



5x Industrial Computer Fanless MiniPC Nuc IBOX-Nano- J1800 N2B



Category:	MiniPC Industry
Manufacturer:	Mobikator
Supported OS:	Microsoft Windows: 7/8/8.1, Linux
Installed OS:	-----
Chipset:	Intel express chipset
CPU Support:	-----
Installed CPU:	Intel Celeron Quad Core J1900 (4x2GHz)
Graphic Card:	Intel HD Graphics
Memory Support:	2GB DDR3 (can up to 8GB)
Installed Memory:	4GB DDR3
Storage (HDD) Support:	SSD + 2,5" HDD
Installed Storage (HDD):	32GB SSD (opc. SSD + 2,5" SSD/HDD)
IP Norm:	-----
Temp:	-20 60
Storage temperature:	-20 ~ 60
Humidity:	0 ~ 95%
Others:	Colour Black
LAN:	Intel RTL8111E 1000M Lan

Wireless LAN card:	Yes
3G:	-----
Bluetooth:	-----
Rear Panel (ports):	DC-IN 12V, 1x HDMI, 1x VGA, 2x RJ-45 LAN, 1x RJ-45 COM
Front Panel (ports):	1x USB 3.0, 3x USB 2.0, 1x Audi, 1x Mic, Power ON/OFF
Expansion:	-----
Power:	12V
Watch Dog Timer:	0 ~ 255 sec
CD/DVD Drive:	-----
TV Tuner:	-----
Dimensions:	134 x 124 x 46 mm
Fanless:	Yes
Weight:	1.6 kg

Product from the Archive - production finished

IBOX-J1800



Industrial Fanless

Fanless industrial PCs are excellent in environments dominated by dust, dirt and moisture. They are ideal for applications that require quiet operation. Small and reliable MiniPC use heat-pipe technology and aluminum fans for passive cooling.

IBOX-Nano-J1800 N2B is a series of devices for industrial applications requiring continuous operation - 24 hours, 7 days a week.

[go top . . .](#)

Housing dimensions are **134 (W) x124 (L) x46 (H) mm**. Housing is made of high quality aluminum what ensures a very high resistance to mechanical damages. This model with weight of only **1.6 kg** is ready at any time for operation even in extreme conditions such as heat, cold, vibration.


Using the latest technology Digital Engine (industrial fanless MiniPC) is designed for continuous multitasking operating with low power consumption. An important advantage is the effective combination of small size with considerable opportunities through the use of Intel's processor family, Intel chipset and **DDR3** memory. Integrated **Intel HD Graphics** video and audio **Realtek ALC662** allow you to play a wide range of applications and media files (video, audio) - in Full HD quality. Disks offer free space **32GB SSD**. Support together: mSata SSD and 2.5 inch SSD/HDD - SATAIII.



mobilator.pl

[go top . . .](#)

Integrated card - **Intel 1000M Lan RTL8111E** and **WiFi** module allows connection to the network. The computer is equipped with: two **LAN** port, one **RJ-45 COM** port, one **HDMI** port, one **VGA** port, three **USB 2.0** ports, one **USB 3.0** port, one way audio, one input mic and a built-in connector on the motherboard: one **NB** connector, one **Mini-SATA** connector, one **SATA** port and one **Mini-PCIE** connector.

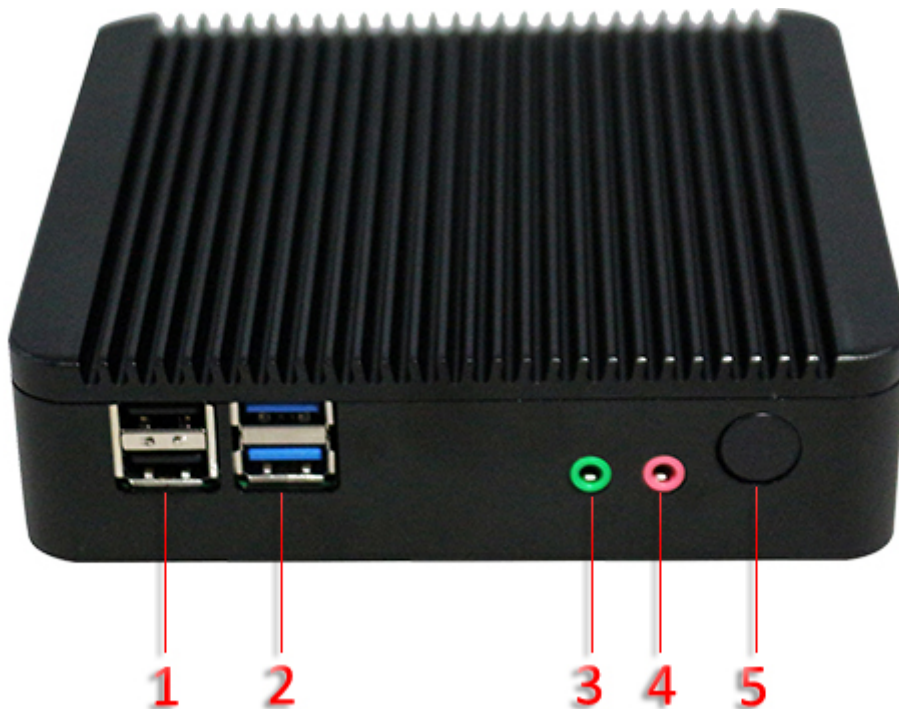

- 1. 3x USB 2.0
- 2. 1x USB 3.0
- 3. 1x Audio

- 4. 1x Mic
- 5. Power ON/OFF



- 1. DC-IN 12V
- 2. 1x HDMI
- 3. 1x VGA



Cooling

The industrial fanless MiniPC IBOX-Nano-J1800 N2B uses a special method of cooling. This cooling takes place mainly by means of housing having a very large surface (longitudinal lamells, ribs) - for heat dissipation.

[go top . . .](#)

Industrial MiniPC Series IBOX-Nano-J1800 N2B are based on high-performance two-core processors and high-quality components. Mini computers are locked in small industrial housing which perfectly discharge heat from the device interior. Wide choice of IBOX models can give possibility to configure, enabling optimal selection of mini computer to multimedia applications and industrial applications. The biggest advantages of these devices are: small size, performance and energy efficiency. An extra pair of brackets at the bottom of the enclosure increases the possibility of installation in all kinds of places and positions. Offered model mini PC has been selectively chosen and configured specifically to the requirements of Digital Signage systems, gaming machines, amusement machines, information kiosks and industrial automation systems.



Dual display



Areas of use of industrial MiniPC

Digital Engine

