

# BOX-NUC-C3L2 (J3060)



IBOX-NUC-C3L2 (J3060) v.2 - Mini industrial computer with fanless casing (2x LAN + WiFi module)



<b>Category:</b>	MiniPC Industry
<b>Manufacturer:</b>	Mobilator
<b>Supported OS:</b>	Windows: 7/8//10   Linux
<b>Installed OS:</b>	-----
<b>Chipset:</b>	Intel Chipset
<b>CPU Support:</b>	Intel Celeron J3060
<b>Installed CPU:</b>	Intel Celeron J3060 dual core 1.6 GHz Turbo boost 2.48 GHz
<b>Graphic Card:</b>	Intel HD Graphics 320MHZ
<b>Memory Support:</b>	SODIMM DDR3L (Max: 8GB)
<b>Installed Memory:</b>	<b>4GB</b>
<b>Storage (HDD) Support:</b>	SSD
<b>Installed Storage (HDD):</b>	<b>256GB</b>
<b>IP Norm:</b>	-----
<b>Temp:</b>	-10°C — 50°C
<b>Storage temperature:</b>	-10°C — 50°C

<b>Humidity:</b>	5% ~ 95%
<b>Others:</b>	Color Black
<b>LAN:</b>	2xIntel WG82583 1000M Lan
<b>Wireless LAN card:</b>	Yes
<b>3G:</b>	-----
<b>4G LTE:</b>	-----
<b>Bluetooth:</b>	-----
<b>Rear Panel (ports):</b>	2x LAN RJ454xUSB2.01x DC 12V
<b>Front Panel (ports):</b>	Power ON2xUSB3.02xHDMI1xRJ45 COM <b>Audio</b>
<b>Expansion:</b>	-----
<b>Power:</b>	12V
<b>Watch Dog Timer:</b>	-----
<b>CD/DVD Drive:</b>	-----
<b>TV Tuner:</b>	-----
<b>Dimensions:</b>	115mm x 107.5mm x 39mm
<b>Fanless:</b>	Yes
<b>Weight:</b>	500g

**Product from the Archive - production finished**

# IBOX-NUC-C3L2 (J3060)



## TECHNICAL SPECIFICATION

## RESISTANCE AND DURABILITY

## CONNECTIVITY AND COMMUNICATION

## DEVICE APPLICATION

## AVAILABLE VERSIONS

Small dimensions industrial computers excel in environments where dust, dirt and moisture predominate. They are ideal for applications requiring quiet operation. Small and reliable MiniPC use heat-pipe technology and aluminum fins for passive cooling. The robust mini Industrial Computer IBOX-NUC-C3L2 is a device designed for all industrial and non-continuous applications

requiring continuous operation - 24 hours, 7 days a week.



### Small dimensions

The compact housing means that the Mini PC will fit wherever you need it and is easy to carry.



### Lightweight design

The computer's weight does not exceed 1.0 kg, so it can be conveniently carried in a bag or backpack.



### Efficient components

The Intel Celeron J3060 dual-core CPU provides improved device performance.



### Wireless network

The mini PC can be

connected to nearby wireless networks by equipping it with an optional Wi-Fi module.

## SSD

### Quick start

A modern SSD drive will increase the speed of application programs and ensure quiet computer operation.



### Passive cooling

The use of passive cooling in the Mini PC ensures silent operation and slows dust deposition.

\* Optional equipment, available only in other versions of the device.

## SPECIFICATION

### Mini-PC IBOX-NUC-C3L2

Processor	Intel Celeron J3060 dual core 1.6 GHz Turbo boost 2.48 GHz
Operation system	Support: Windows 7/8/10 Linux
RAM	4 GB SODIMM DDR3L

Mini-PC IBOX-NUC-C3L2	
Drive	256 GB SSD
Graphic card	Intel HD Graphics 320MHZ
Connectivity	WiFi LAN: 2xIntel WG82583 1000M Lan
Front panel	2xUSB 3.0   2xHDMI   Audio 1xRJ45 COM Support CONSOLE
Rear panel	2xRJ45 1000M LAN   4 xUSB 2.0   1x DC 12V
Available colors	Black
Dimensions	115 x 107.5 x 39mm
Weight	0.5 kg

\* Optional equipment, available only in other versions of the device.



Detailed device specification is available in the "Technical data".

### Efficient processor


The industrial mini-computer IBOX-NUC-C3L2 uses an efficient and energy-saving Intel Celeron J3060 processor. Inside it there are two cooperating cores enabling more efficient processing of many tasks at the same time. The shared cache memory in which the multilevel hierarchy is used is dynamically allocated to each processor core depending on the load. This reduces the average access time to the main memory. It offers improved manageability by limiting downtime and maintaining productivity by isolating computing activities into separate partitions.

## Interfaces



## Dimensions

Thanks to the small dimensions of the MiniPC, the IBOX-NUC-C3L2 is versatile for use at home, in the office and in the industry, for example in the production hall. It's literally everywhere, and thanks to the VESA mount it can be mounted on the back of the monitor to optimize the job.

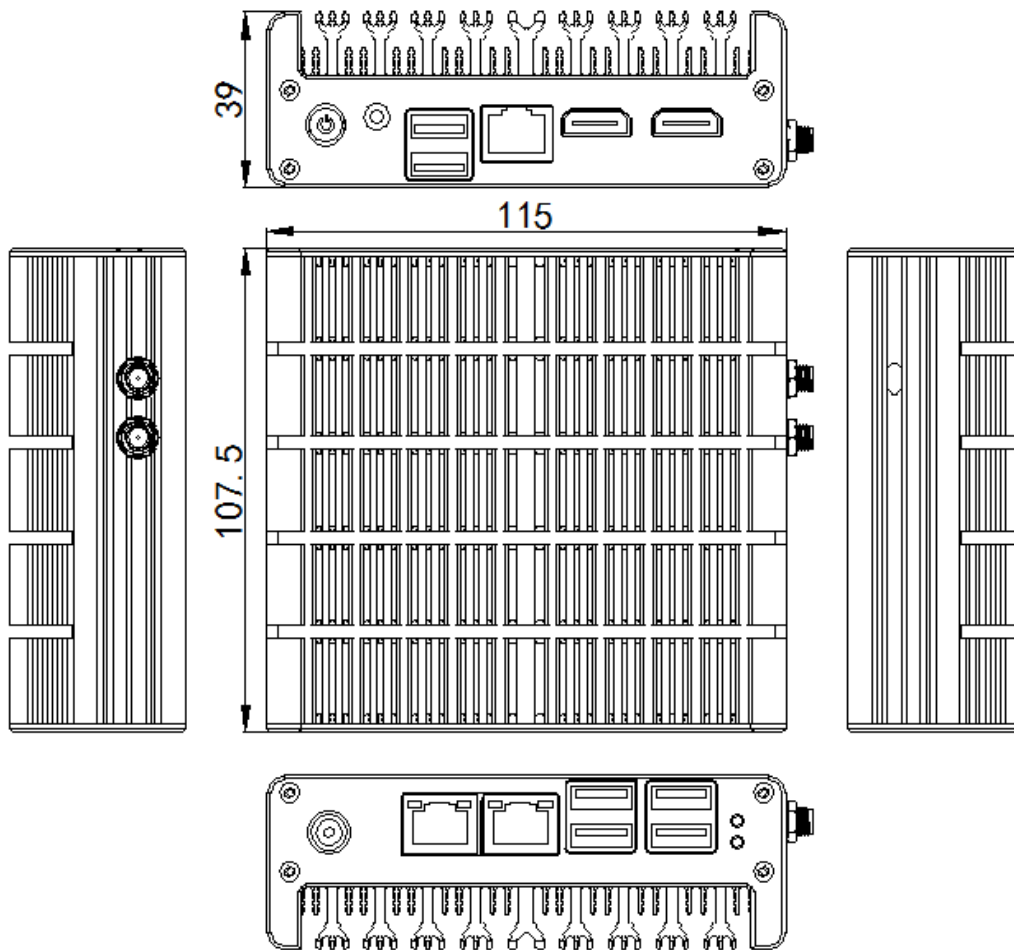


<b>Dimensions</b>	115 x 107.5 x 39mm
<b>Weight</b>	0.5 kg

Passive cooling

The industrial Mini PC uses a proven cooling system, based only on solid elements, mainly heat sinks. The system uses the phenomenon of metals passing thermal energy into the environment - there are no additional moving elements in the form of eg fans. This solution ensures noiseless operation, lower failure rate and greater protection against dust and other dirt while reducing the amount of energy consumed.

## RESISTANCE AND DURABILITY

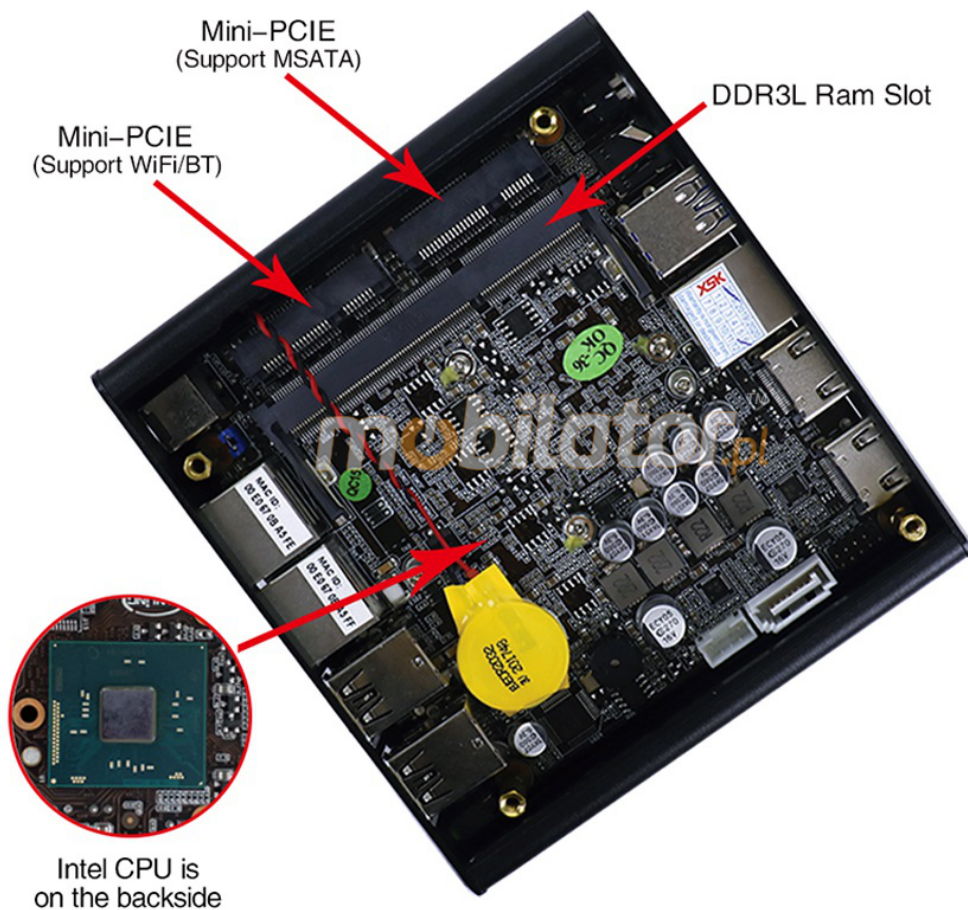

## Temperatures

IBOX-NUC-C3L2 is designed for continuous operation in both very low and high temperatures ranging from -10 °C to 50°C. If the device is switched off, it can already handle temperatures in the range of -10 °C to 50 °C.

<b>Work temp.</b>	-10°C do 50°C
<b>Storage temp.</b>	-10°C do 50°C
<b>Humidity</b>	5% do 95%

## Mechanical damage

The passive cooling system used in the MiniPC IBOX-NUC-C3L2

combined with the SSD disk makes this computer very resistant to various types of mechanical injuries. An additional advantage of industrial computers is a solid construction made of high quality aluminum and specially designed in such a way that in addition to high efficiency in heat dissipation, it can also resist any external damage.

## CONNECTIVITY AND COMMUNICATION

### Wireless network (Option)

The dual-band Wi-Fi module provides quick access to the network wherever you can connect to secured or open Wi-Fi networks. This is a convenient solution for people who have a router at home or place of residence and a wireless network that can be used at no extra charge. Industrial mini-PC IBOX-NUC-C3L2

has been equipped the standard of - 802.11n, which allows transfer of files at a dizzying speed of up to 300 Mb / s.

### Wired LAN Network

The MiniPC IBOX-NUC-C3L2

has built-in Realtek network adapter that can work in a fast Gigabit Ethernet network.




## DEVICE APPLICATION

Trade and service


Mini PC is an ideal tool to support us in the implementation of many activities in the field of trade, small dimensions increase the possibility of its adaptation to activities such as issuing invoices or preparing documentation, which in turn allows us to convenient and optimal sales management. The VESA holder mounted to the housing provides many installation options, eg in stores (at the cash register, under the desktop, behind the LCD / LED monitor), in factory halls or in a delivery truck.

# VESA Mount

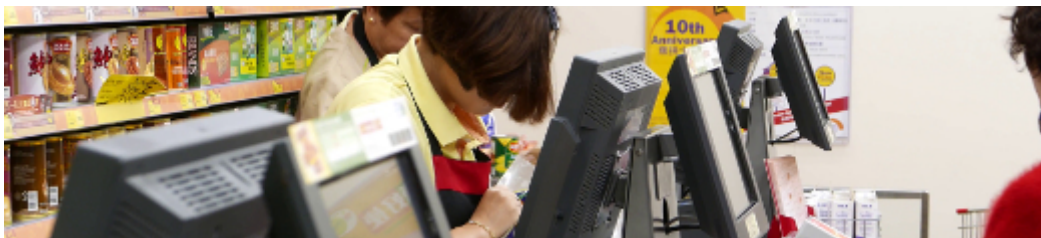

## Warehouse and logistics

Thanks to high performance an industrial computer can be used to connect multiple devices in a warehouse and make their management much easier. Its rugged casing and the fanless cooling system are ideal for harsh environments in such rooms. The solid construction guarantees long-lasting work, even in environments with high dustiness and dirt.

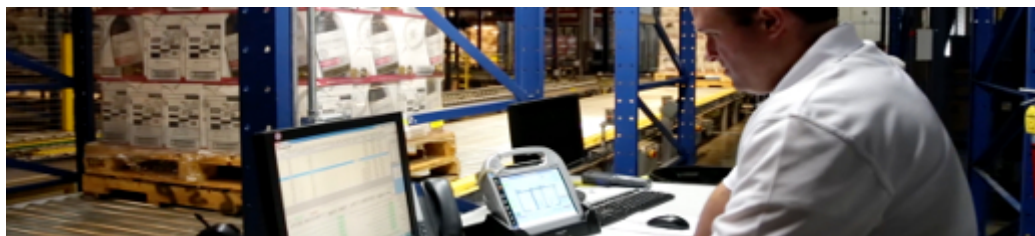

## Transport and motorization

A small industrial computer can be used in transport thanks to the ability to work on 12V power supply. Then the mini computer can be used in passenger cars, buses, trams, taxis, trains and even in airplanes. It allows you to inform the driver about the current state of the vehicle, transfer its current location to the management center, display information for passengers, etc. It performs well in vehicles where small dimensions are important.



More photos in full resolution available in the "Gallery".

## AVAILABLE VERSIONS

The industrial mini-computer IBOX-NUC-C3L2

is offered in several versions to suit different needs. By clicking on the number of the hardware configuration you will be redirected to the product with the parameters given in the table below. In addition, it is possible to create a configuration that is currently unavailable on the customer's request.

	v.1	v.2	v.3	Barebone
2 GB DDR3		—	—	—
4GB DDR3	—		—	—
8GB DDR3	—	—		—
64 GB SSD		—	—	—
256GB SSD	—		—	—
512GB SSD	—	—		—

WiFi

—