



## Industrial Fanless MiniPC IBOX-I3-3217u



|                                 |                                       |
|---------------------------------|---------------------------------------|
| <b>Category:</b>                | MiniPC Industry                       |
| <b>Manufacturer:</b>            | Mobikator                             |
| <b>Supported OS:</b>            | Microsoft Windows: XP/Vista/7 , Linux |
| <b>Installed OS:</b>            | -----                                 |
| <b>Chipset:</b>                 | Intel HM77                            |
| <b>CPU Support:</b>             | -----                                 |
| <b>Installed CPU:</b>           | Intel I3 3217u (2x1.8GHz)             |
| <b>Graphic Card:</b>            | Intel HD 4000                         |
| <b>Memory Support:</b>          | 4GB DDR3 (can up to 8GB)              |
| <b>Installed Memory:</b>        | 4GB DDR3                              |
| <b>Storage (HDD) Support:</b>   | -----                                 |
| <b>Installed Storage (HDD):</b> | 64 GB SSD                             |
| <b>IP Norm:</b>                 | -----                                 |
| <b>Temp:</b>                    | 0 ~ 60                                |
| <b>Storage temperature:</b>     | -15 - 65                              |
| <b>Humidity:</b>                | 0 ~ 95%                               |
| <b>Others:</b>                  | Colour Black, Case                    |
| <b>LAN:</b>                     | Intel RTL8111E 1000M Lan              |
| <b>Wireless LAN card:</b>       | No (optional Yes)                     |
| <b>3G:</b>                      | -----                                 |

|                             |  |
|-----------------------------|--|
| <b>Bluetooth:</b>           | -----  |
| <b>Rear Panel (ports):</b>  | 4x USB 2.0,1x Audio,1x RJ-45, DC-in Jack, 1x LPT,1x Mic,1x COM(RS232),1x VGA |
| <b>Front Panel (ports):</b> | 2x USB 2.0   |
| <b>Expansion:</b>           | WiFi   |
| <b>Power:</b>               | 12V  |
| <b>Watch Dog Timer:</b>     | 0 ~ 255 sec  |
| <b>CD/DVD Drive:</b>        | -----  |
| <b>TV Tuner:</b>            | -----  |
| <b>Dimensions:</b>          | 234 x 204 x 54 mm  |
| <b>Fanless:</b>             | Yes  |
| <b>Weight:</b>              | 2.4 kg   |

**Product from the Archive - production finished**



## Industrial Fanless

Fanless industrial PCs are excellent in environments dominated by dust, dirt and moisture. They are ideal for applications that require quiet operation. Small and reliable MiniPC use heat-pipe technology and aluminum fans for passive cooling.

**IBOX - I3-3217u** is a series of devices for industrial applications requiring continuous operation - 24 hours, 7 days a week.

[go top . . .](#)

Housing dimension are **234 (W) x204 (L) x54 (H) mm**. Housing is made of high quality aluminum what ensures a very high resistance to mechanical damages. This model with weight of only **2.4 kg** is ready at any time for operation even in extreme conditions such as heat, cold, vibration.

Using the latest technology Digital Engine (industrial fanless MiniPC) is designed for continuous multitasking operating with low power consumption. An important advantage is the effective combination of small size with considerable opportunities through the use of Intel's processor family, Intel chipset and **4GB DDR3** memory. Integrated **Intel HD 4000** video and audio **Realtek ALC662** allow you to play a wide range of applications and media files (video, audio) - in Full HD quality. Disks offer free space from **64GB SSD** to **256GB SSD** (from **320GB** to **1TB HDD**).



[mobilator.pl](http://mobilator.pl)

[go top . . .](#)

Integrated card - **Intel RTL8105E 100M** (optional WiFi module) allow connection to the network. The computer is equipped with: one **LAN** port, one **COM port (RS232)**, six **USB 2.0** ports, one **HDMI** input, one **VGA** input, one way audio, one microphone input and connectors built into the motherboard: four **USB 2.0** ports, two **PowerOUT** outputs, one audio output, one **CPUFAN**, one **JVGA** connector, one **LVDS** connector.

### LVDS Interface


This is a fast digital interface that is used for many applications requiring: a high resistance to interference electromagnetic, low energy consumption at high data rates. LVDS is used in various applications and industries, including commercial and military applications.

## Front panel:




1. 2x USB 2.0
2. Power

## Rear panel:

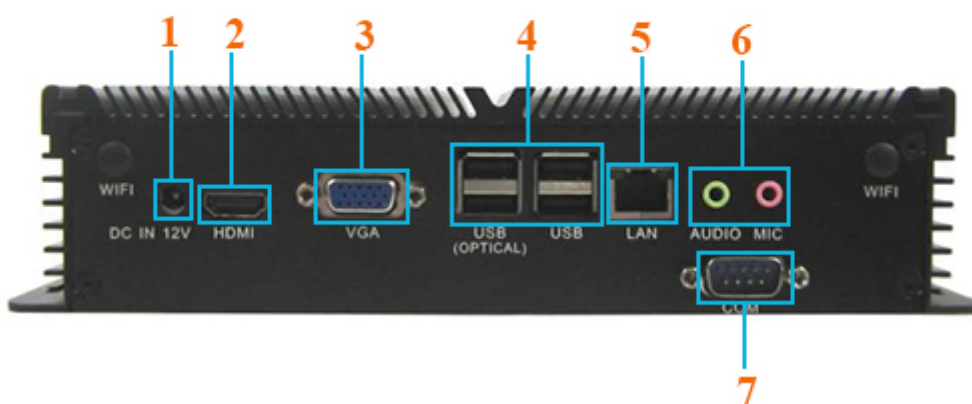

- |              |                  |
|--------------|------------------|
| 1. DC-IN 12V | 5. 1x RJ-45      |
| 2. 1x HDMI   | 6. Audio/Mic     |
| 3. 1x VGA    | 7. 1x COM(RS232) |

## Mainboard:

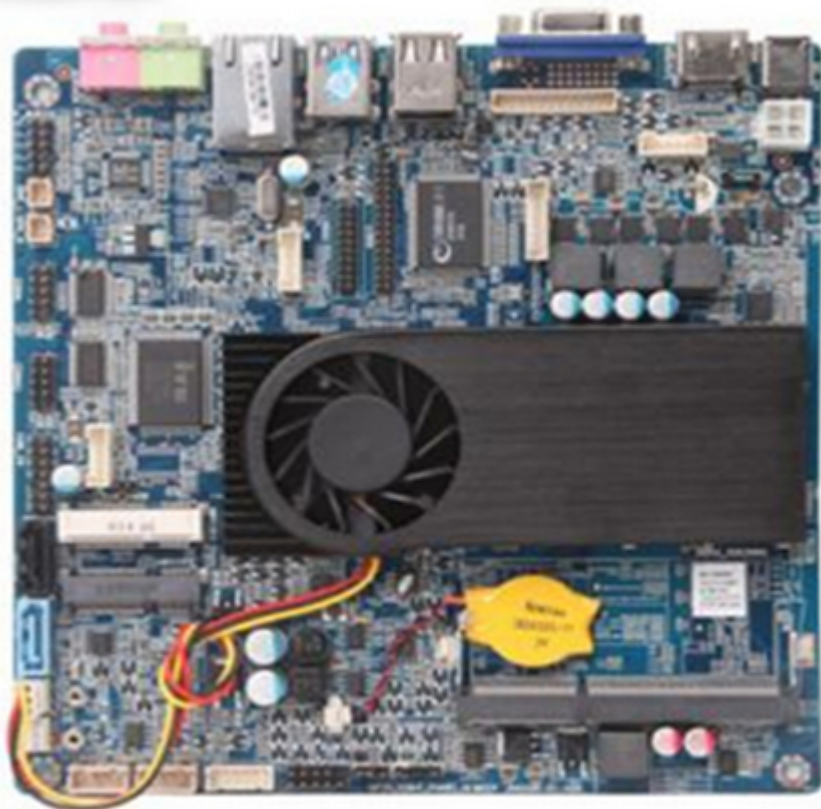

[mobilator.pl](http://mobilator.pl)

## Cooling

The industrial fanless MiniPC IBOX - I3-3217u uses a special method of cooling. This cooling takes place mainly by means of housing having a very large surface (longitudinal lamells, ribs) - for heat dissipation. Fan used inside the computer is designed to rapidly drain hot air from the CPU, allowing MiniPC to reach more efficiently and faster cooling.

[go top . . .](#)



Industrial MiniPC Series IBOX - I3-3217u are based on high-performance two-core processors **Intel Atom I3** and high-quality components. Mini computers are locked in small industrial housing which perfectly discharge heat from the device interior. Wide choice of IBOX models can give possibility to configure, enabling optimal selection of mini computer to multimedia applications and industrial applications. The biggest advantages of these devices are: small size, performance and energy efficiency. An extra pair of brackets at the bottom of the enclosure increases the possibility of installation in all kinds of places and positions. Offered model mini PC has been selectively chosen and configured specifically to the requirements of Digital Signage systems, gaming machines, amusement machines, information kiosks and industrial automation systems.



*mobilator.pl*



### Dual Display

