



TOUCH
SCREEN



RFID



WiFi[®]

Mobitouch 101W-LF+2D v.7 - Dust and water resistant operator panel with resistive touch screen, 4G, WiFi, RFID HF 13.56 MHz + LF 125 kHz, Windows 11 and BT

| | |
|---------------------------------|--|
| Category: | Industrial Panel PC Computers |
| Manufacturer: | Mobilator |
| Screen size: | 10.1 inch |
| Resolution: | 800x1280 |
| Aspect ratio: | 16:10 |
| Touchscreen: | Resistive |
| Chipset: | Intel |
| CPU Support: | Celeron |
| Installed CPU: | Intel Celeron J6412 |
| Memory Support: | DDR4 |
| Installed Memory: | 8GB |
| Graphic Card: | Integrated graphics Intel UHD Graphics |
| Audio: | Yes |
| Storage (HDD) Support: | SSD / HDD |
| Installed Storage (HDD): | 256GB SSD |

| | |
|--|--|
| CD/DVD Drive: | No |
| LAN: | 2xRealtek RTL 8111E Gigabit Ethernet |
| Wireless LAN card: | Yes |
| Bluetooth: | Yes |
| 3G: | Yes |
| 4G LTE: | Yes |
| GPS: | No |
| TV Tuner: | No |
| Watch Dog Timer: | Tak |
| Ports - front panel: | ----- |
| Ports - rear panel: | Phoenix terminal RS232 2xUSB 3.0 2xUSB 2.0 2xRJ-45 LAN HDMI SIM DC VGA |
| Ports - left panel: | ----- |
| Ports - right panel: | ----- |
| Power: | DC-12V |
| Supported OS: | WINDOWS 10/11, Ubuntu/Redhat/Debian |
| Installed OS: | Windows 11 PRO |
| Dimensions: | 261.4 x 185.4 x 53 mm |
| Weight: | 1.5kg |
| Expansion: | 2x speaker |
| Fanless: | Yes |
| Humidity: | 5% - 95% Non-Condensing |
| Temp: | -10 °C to 60 °C |
| Storage Temp: | -20 °C to 70 °C |
| IP Norm: | ----- |
| IP Level (back panel): | ----- |
| IP Level (front panel): | IP65 |
| Dual display: | Yes |
| Response time touch-panel (ms): | 7-30 ms |

| | |
|---|---|
| Contrast Ratio: | 1000:1 |
| Brightness: | 300 cd/m2 |
| Viewing Angle: | 85/85/85/85(L/R/U/D) |
| Backlight MTBF: | Yes |
| Color Resolution: | 16,7M |
| Surface hardness (display): | 7H |
| Touch Life(contacts): | 60000-70000 |
| Housing material: | Aluminium |
| Mounting VESA: | 75 x 75 mm 100 x 100 mm |
| Folding Bracket (for office type working): | ----- |
| Power Consumption: | 20-30 w |
| Others: | Color: Silver |
| Anti-vibration: | ----- |
| Anti-shock: | ----- |
| RFID scanner (reader): | LF (125 kHz) + HF (13,56 MHz - ISO14443A/B) |
| Barcode reader: | EM-23 FUJIAN |

Product from the Archive - production finished



TOUCH
SCREEN



RFID



SPECIFICATION AND PARAMETERS

DISPLAY AND TOUCH

RESISTANCE AND PROTECTION

COMMUNICATION AND CONNECTORS

APPLICATION

AVAILABLE VERSIONS AND ACCESSORIES

Industrial PC panels are integrated devices consisting of a PC computer and a touch monitor. Due to their design, they can work even under severe conditions prevailing in industrial environments, such as high humidity, high dustiness, contact with water or very low or high temperatures. These panels

are characterized by high efficiency and stability of operation in all conditions.



Efficient cooling

The housing with notches used in the panel ensures good air exchange inside the device



Quick start

A modern SSD drive will increase the speed of applications and programs and ensure quiet computer operation.



Efficient

The quad-core Intel Celeron J6412 improves the device's performance.



Bright Screen

The display with 300 cd/ m² brightness makes the picture much more vivid and better readable when used outside in the sun.



Wireless network

The panel can be connected to nearby wireless networks by equipping it with a Wi-Fi module



Resistive screen

The resistive screen allows precise handling and gentle on-screen movement.

Specifications and parameters

Performance

| | |
|---------------|----------------------------------|
| Processor | Intel Celeron J6412 (4x 2.0 GHz) |
| Graphics card | Integrated Intel UHD Graphics |

| Performance | |
|------------------|---|
| Operating system | Windows 11 PRO |
| RAM | 8GB |
| Drive | 256GB SSD |
| Display | |
| Screen | 10.1" 800x1280 |
| Touch screen | Resistive |
| Brightness | 300cd/m ² |
| Screen ratio | 16:9 |
| View angle | 85/85/85/85(L/R/U/D) |
| Interfaces | |
| Communication | WiFi Bluetooth 4G |
| Connectors | Phoenix terminal RS232 2xUSB 3.0 2xUSB 2.0 2xRJ-45 LAN HDMI SIM DC VGA |
| RFID | LF 125 kHz + HF 13,56 MHz |
| Skaner 2D | EM-23 FUJIAN |
| Other | |
| Dimensions | 261.4 x 185.4 x 53 mm |
| Weight | 1.5 kg |
| Casing material | Aluminium |



Detailed device specification is available in the "Technical data".

The industrial PC panel uses an efficient and energy-saving Intel Celeron J6412 (4x 2.0 GHz). In its interior there are four cooperating cores enabling more efficient processing of many tasks at the same time. Shared cache memory in which a multi-level hierarchy is used is dynamically allocated to each processor core depending on the load. This reduces the average access time to the main memory. Improved graphics card technology allows you to enjoy movies at full resolution and HD quality.



More photos in full resolution available in the "Gallery".

NPU

A special type of chip designed to handle artificial intelligence tasks. It allows a device to recognize images, voice, or text more quickly, while also operating more efficiently and saving energy. The NPU enables the use of smart features without delays, which translates into a more convenient and modern everyday user experience.

Display and touch

Amplified, metal industrial computer Mobitouch 101W-LF+2D has a water-resistant and scratch-proof 10.1" LED screen 800x1280 resolution offers good image quality, and high brightness in the 300 cd/m² range gives better color saturation and contrast and allows significantly improved visibility even in the case of incident. The display of the resistive type provides the user with a clear image and ease of use by touch.

RESISTIVE SCREEN

resistive plastic film touch type (polyimide film) 10.1" 1280x800. The resistive screen is made of

Resistance and protection

QUALITY OF MATERIALS

The panel PC has a good-quality metal casing. It is an important element of the cooling system thanks to specially designed cutouts that facilitate air circulation inside the housing. The overall design of the device is focused on simplicity and functionality, appreciated among professionals, as an accessory the panel can be equipped with passive cooling.



EXTREME TEMPERATURES

PanelPC Mobitouch 101W-LF+2D is designed for continuous operation both at very low and high temperatures in the range from -10 ° C to 60 ° C. If the device is turned off, it can handle temperatures ranging from -20 ° C to 70 ° C. In addition, the durable PanelPC is perfect for rooms with increased humidity, ensuring proper functioning even in the case of 95% relative air humidity. It is also possible to purchase additional fanless cooling.

| | |
|---------------|-------------------------|
| Work temp. | -10°C do 60°C |
| Storage temp. | -20°C do 70°C |
| Humidity | 5% - 95% Non-Condensing |

Communication and connectors

WIRELESS WI-FI NETWORK

The dual-band Wi-Fi module provides quick access to the network wherever you can connect to secured or open Wi-Fi networks. This is a convenient solution for people who have a router at home or place of residence and a wireless network that can be used at no extra charge. The shockproof industrial panel Mobitouch 101W-LF+2D has been equipped with standards - 802.11n, which allows transfer of files at a dizzying speed of up to 150 Mb/s.

| | |
|-------------|---------------|
| Standards | 802.11a/b/g/n |
| Frequencies | 2.4GHz |



BLUETOOTH COMMUNICATION

Bluetooth enables short-range wireless communication between various electronic devices, such as keyboard computer, laptop, PDA, mobile phone and many others. In the fourth version of standard, energy consumption was significantly reduced transfer and the real range of operation was increased



4G

4G technology is based on a radio network with high-speed transmission and a low incidence of do



RFID READER

RFID is a technology used to identify objects and control the flow of products. Reading information

CODE SCANNER


The barcode reader allows you to read, decode, and transfer data stored in a barcode to a computer




2D


1D


CONNECTORS AND INTERFACES

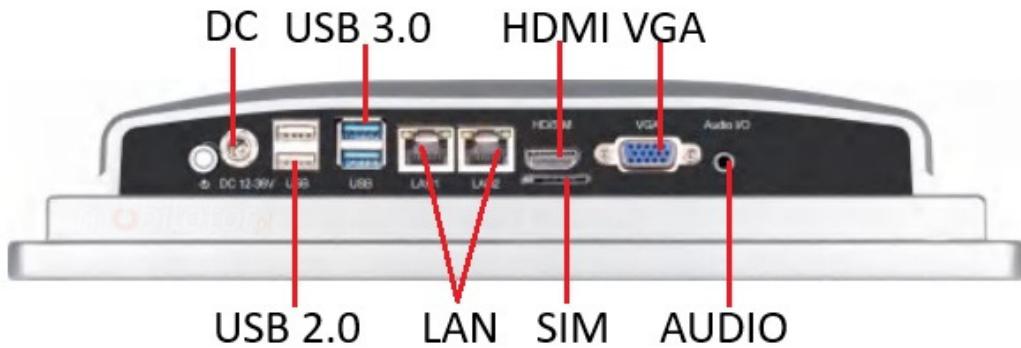


DIMENSIONS

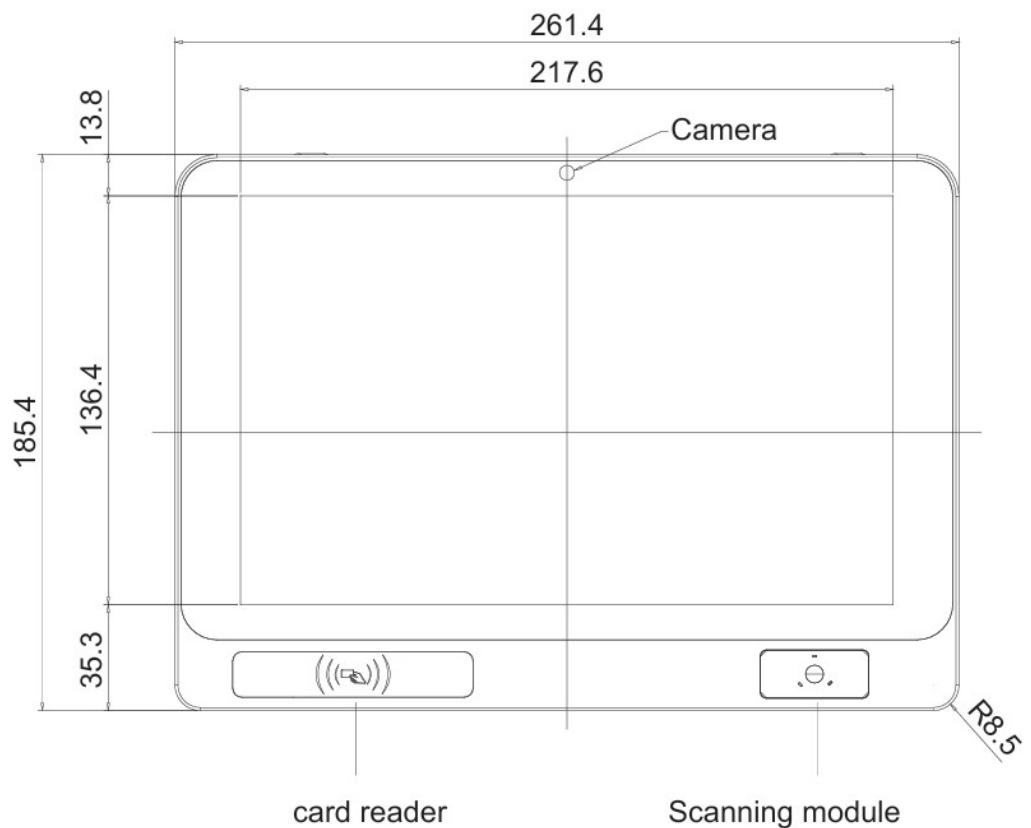

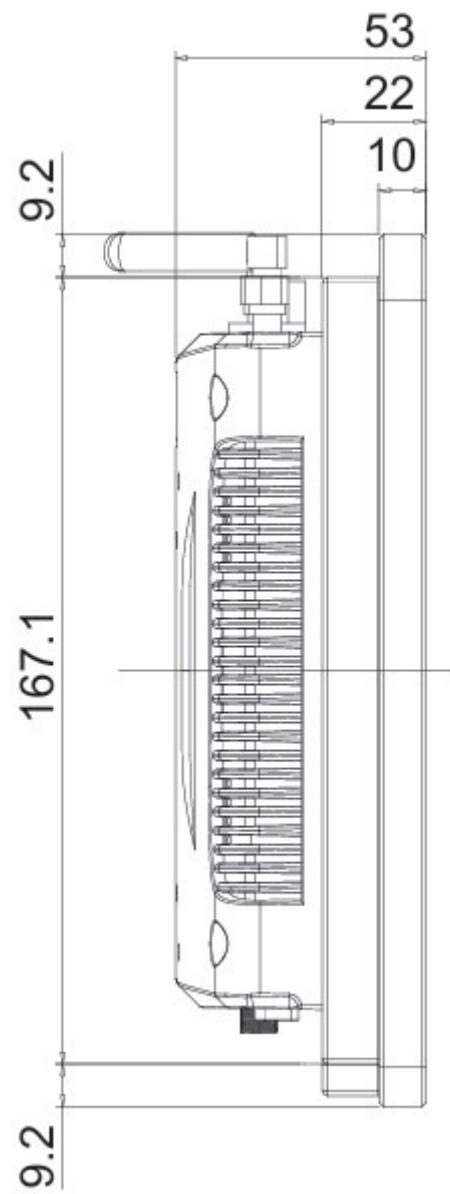

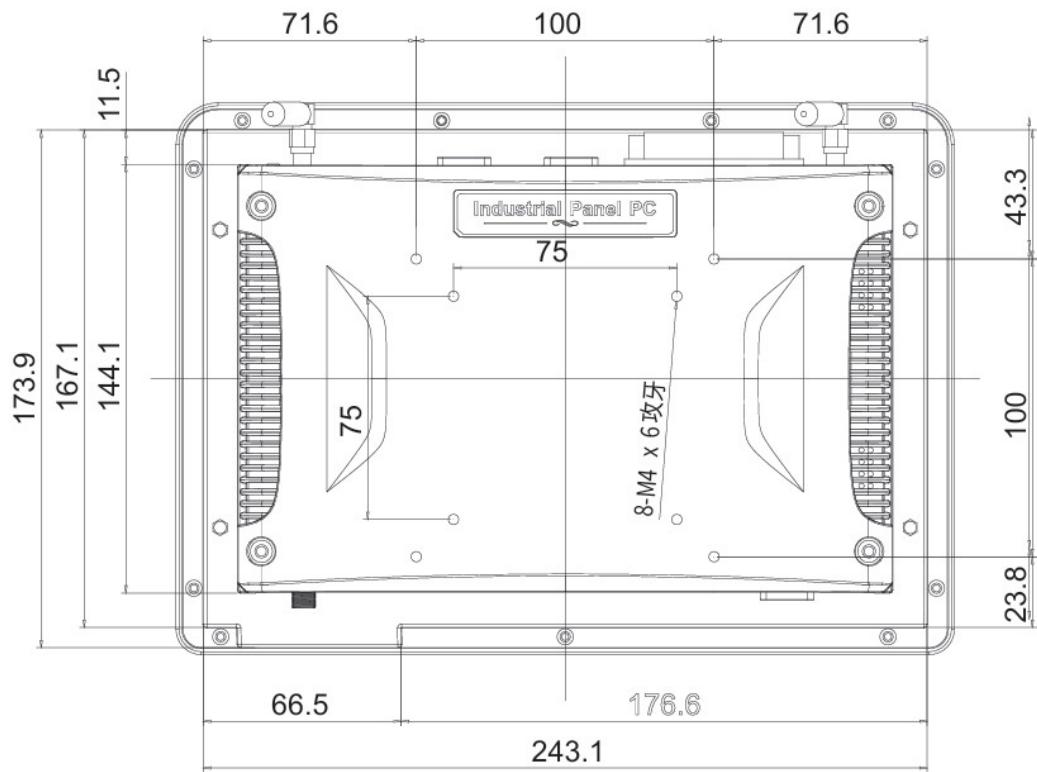

Application

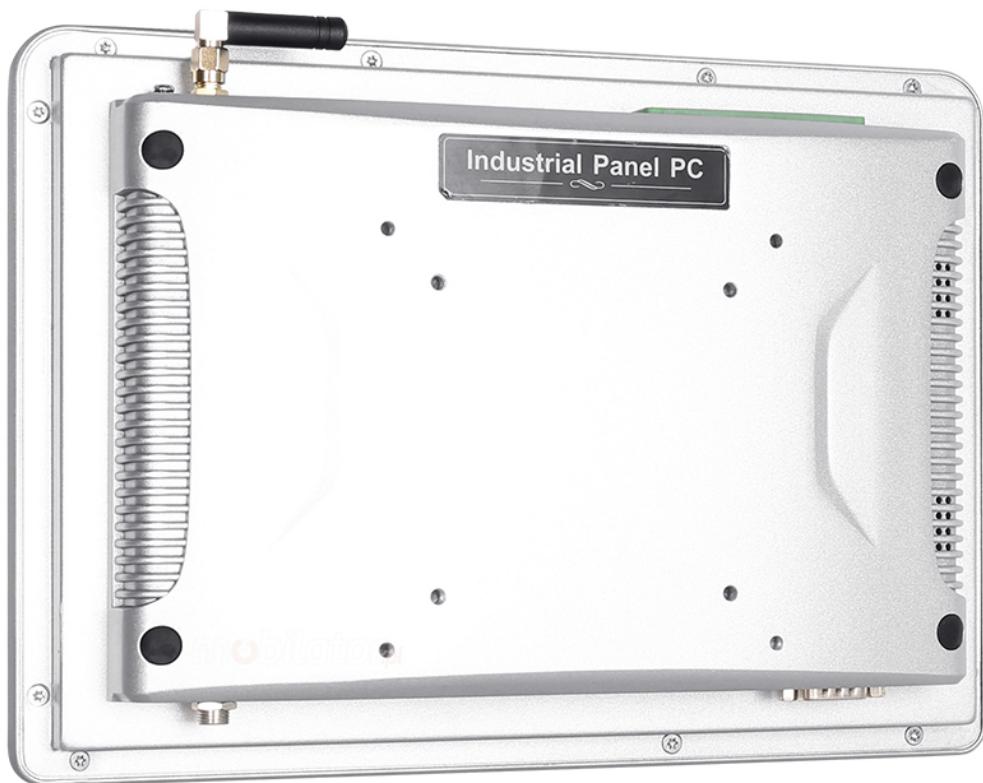

TRADE AND SERVICES

PC Panel is widely used primarily in the commercial industry, for example for controlling the sales system, displaying product information on monitors or advertising on large screens. With the VESA holder in the housing there are many possibilities for its assembly, eg in stores (at the cash register) in factory halls, in a car delivering products, etc. It will certainly be used in all types of retail chains.

WAREHOUSE AND MANAGEMENT



The industrial panel computer thanks to the RS232 interface can be used to connect many devices in the warehouse and facilitate their control. And its rugged housing is ideally suited to the harsh conditions prevailing in such rooms. No dust or dirt will prevent him from working, he will work without complaints even in a large dusty and dirty environment.

TRANSPORT AND MOTORIZATION



Panel computers can be used in transport by adapting it to work on 12V power supply. Then Panel PC can be used in passenger cars, buses, trams, taxis, trains and even in airplanes. Thanks to the integrated monitor, these panels perform very well in vehicles where mobility and the small size of the device are important.

Available versions and accessories

Industrial Panel PC Mobitouch 101W-LF+2D is offered in several versions adapted to different needs. By clicking on the number of the hardware configuration you will be redirected to the product with the parameters given in the table below. In addition, it is possible to create a configuration that is currently unavailable on the customer's request.

| | v.1 | v.2 | v.3 | v.4 | v.5 | v.6 | v.7 | v.8 | v.9 | v.10 |
|----------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|-------------|
| Screen beztouch | — | — | — | — | — | — | — | — | — | — |
| Capacitive screen | — | | | | | — | — | — | — | — |
| Screen rezystywny | — | — | — | — | — | — | | | | |
| 4GB RAM | | | | — | — | — | — | — | — | — |
| 8GB RAM | — | — | — | | | — | — | | | |

| | | | | | | | | | |
|----------------|---|---|---|---|---|---|---|---|---|
| 16GB RAM | — | — | — | — | — | — | — | — | — |
| 128GB SSD | | | — | — | — | — | — | — | — |
| 256GB SSD | — | — | | | | — | | | |
| 512GB SSD | — | — | — | — | — | — | — | — | |
| 4G | — | — | — | — | | | — | | |
| Scanner 2D | | | | | | | | | |
| LF RFID 125kHz | | | | | | | | | |