



SSD
DRIVES

Wi-Fi



MobiTouch 7RKK4 - reinforced industrial 7-inch computer panel with Android system and with the IP65 standard on the front part of the housing

Category:	Industrial Panel PC Computers
Manufacturer:	Mobilator
Screen size:	7"
Resolution:	1024x600
Aspect ratio:	----
Touchscreen:	capacitive
Chipset:	Cortex
CPU Support:	Dual core Cortex-A72 + Quad Core Cortex-A53
Installed CPU:	Dual core Cortex-A72 + Quad Core Cortex-A53
Memory Support:	DDR3L SO-DIMM (max. 8GB)
Installed Memory:	4GB
Graphic Card:	Mali-T864 GPU 4gen
Audio:	----
Storage (HDD) Support:	SSD
Installed Storage (HDD):	32 GB SSD
CD/DVD Drive:	-----
LAN:	Realtek RTL8111E 10/100/1000 Mb/s

Wireless LAN card:	802.11 a/b/g/n
Bluetooth:	4.0
3G:	No
GPS:	-----
TV Tuner:	-----
Watch Dog Timer:	-----
Ports - front panel:	-----
Ports - rear panel:	DC-IN2x USB 2.01x RS2321x Gigabit LAN1x SIM and SD1x HDMI
Ports - left panel:	-----
Ports - right panel:	-----
Power:	12V DC-in
Supported OS:	Android
Installed OS:	Android 7.1
Dimensions:	240 mm x 170 mm x 54.5 mm
Weight:	1.4 kg
Expansion:	-----
Fanless:	Yes
Humidity:	10%~ 80%
Temp:	0°C ~ 70°C
Storage Temp:	-20°C ~ 70°C
IP Norm:	-----
IP Level (back panel):	-----
IP Level (front panel):	IP65
Dual display:	Yes
Contrast Ratio:	800:1
Brightness:	300 cd/m ²
Viewing Angle:	85/85/85/85
Backlight MTBF:	LED

Color Resolution:	-----
Surface hardness (display):	-----
Touch Life(contacts):	-----
Housing material:	Aluminium
Mounting VESA:	Yes
Folding Bracket (for office type working):	-----
Power Consumption:	-----
Others:	Color Black
Anti-vibration:	-----
Anti-shock:	-----
RFID scanner (reader):	-----
Barcode reader:	-----

1 897,77 zł

net price: 1 542,90 zł

MobiTouch RKK4



SPECIFICATION AND PARAMETERS

DISPLAY AND TOUCH

RESISTANCE AND PROTECTION

COMMUNICATION AND CONNECTORS

APPLICATION

AVAILABLE VERSIONS AND ACCESSORIES

Industrial PC panels are integrated devices consisting of a PC computer and a touch monitor. Due to their design, they can work even under severe conditions prevailing in industrial environments, such as high humidity, high dustiness, contact with water or very low or high temperatures. These panels are characterized by high efficiency and stability of operation in all conditions.



Passive cooling

Use of passive cooling in the PC panel ensures silent operating and slows down deposition of dust.



Quick start

A modern SSD drive will increase the speed of applications and programs and ensure quiet computer operation.



Efficient

The two- and quad-core Cortex processor improves the device's performance.



Bright Screen

The display with 300 cd/ m² brightness makes the picture much more vivid and better readable when used outside in the sun.



Wireless network

The panel can be connected to nearby wireless networks by equipping it with an optional Wi-Fi module.



Capacitive screen

The capacitive screen allows precise handling and gentle on-screen movement.

Specifications and parameters

Performance

Processor	Dual core Cortex-A72 + Quad Core Cortex-A53
Graphics card	Mali-T864 GPU Dual Channel 4gen
Operating system	Android 7.1
RAM	4GB DDR3L
Drive	SSD: 32 GB
Display	
Screen	7" (1024 x 600)
Touch screen	capacitive
Brightness	300cd/m ²
Screen ratio	5:3
View angle	85/85/85/85
Touch screen lifetime	>50.000.000
Interfaces	
Communication	802.11a/b/g/n Bluetooth 4.0
Connectors	2x USB 2.0 1x COM 1x LAN 1x SD and SIM 1x HDMI DC 12V
Other	
Dimensions	240 x 170 x 54.5 mm
Weight	1.4 kg
Casing material	Aluminum alloy

* Optional equipment, available only in specific versions of the device.



Detailed device specification is available in the "Technical data".

The dust-proof industrial PC panel uses an efficient and energy-saving Dual core Cortex-A72 + Quad Core Cortex-A53 processor. In its interior there are two cooperating cores enabling more efficient processing of many tasks at the same time. Shared cache memory in which a multi-level hierarchy is used is dynamically allocated to each processor core depending on the load. This reduces the average access time to the main memory. Improved graphics card technology allows you to enjoy movies at full resolution and HD quality.



More photos in full resolution available in the "Gallery".

Display and touch

Amplified, waterproof industrial computer MobiTouch 7RKK4 has a water-resistant and scratch-proof 7" LED screen 1024x600 resolution offers good image quality, and high brightness in the 300 cd/m² range gives better color saturation and contrast and allows significantly improved visibility even in the case of incident. The display of the resistive type provides the user with a clear image and ease of use by touch.

CAPACITIVE SCREEN (AVAILABLE IN LTA VERSION)

The capacitive screen consists of a glass coating that is covered with an insulator. Touching the surface of the touch pad with your finger causes a disturbance in the flow of electric current. This display provides very good visibility under industrial conditions. The panel can be operated with one finger or conductive material (special glove). This type of screen provides support for multi-touch technology, which is a clear convenience during work. This is due to the fact that a large number of electrodes allows accurate detection of many points of touch. You do not have to use a stronger pressure for capacitive screens, because you only need to lightly brush the screen with your finger to make the device react.



Resistance and protection

QUALITY OF MATERIALS

Panel PC has a high quality casing made from aluminum alloys. It is a very crucial component of cooling system thanks to openings allowing air flow inside casing, specially important in a passive system. Overall design concentrates on simplicity and functionality which are in high demand amongst professionals.



EXTREME TEMPERATURES

PanelPC MobiTouch 7RKK4 is adapted for continuous operation in both very low and high temperatures in the range from -10 ° C to 70 ° C. If the device is switched off, it can already handle temperatures between -30 ° C and 70 ° C. In addition, the durable PanelPC is perfect for rooms with increased humidity, ensuring proper functioning even in the case of 80% relative humidity.

Work temp.	0°C do 60°C
Storage temp.	-20°C do 70°C
Humidity	10% - 80%

Communication and connectors

WIRELESS WI-FI NETWORK



The dual-band Wi-Fi module provides quick access to the network wherever you can connect to secured or open Wi-Fi networks. This is a convenient solution for people who have a router at home or place of residence and a wireless network that can be used at no extra charge. The shockproof industrial panel MobiTouch 7RKK4 has been equipped with standards - 802.11n, which allows transfer of files at a dizzying speed of up to 150 Mb/s.

Standards	802.11a/b/g/n
Frequencies	2.4GHz 5GHz

CONNECTORS AND INTERFACES




DIMENSIONS

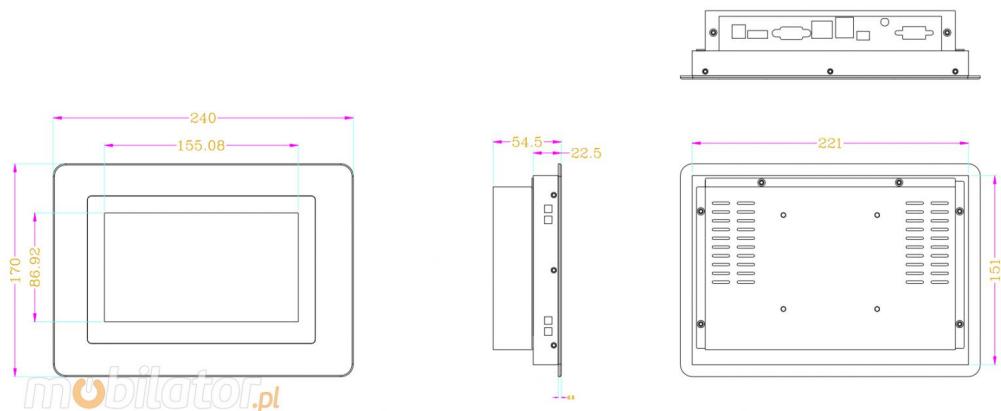

TRADE AND SERVICES

PC Panel is widely used primarily in the commercial industry, for example for controlling the sales system, displaying product information on monitors or advertising on large screens. With the VESA holder in the housing there are many possibilities for its assembly, eg in stores (at the cash register) in factory halls, in a car delivering products, etc. It will certainly be used in all types of retail chains.

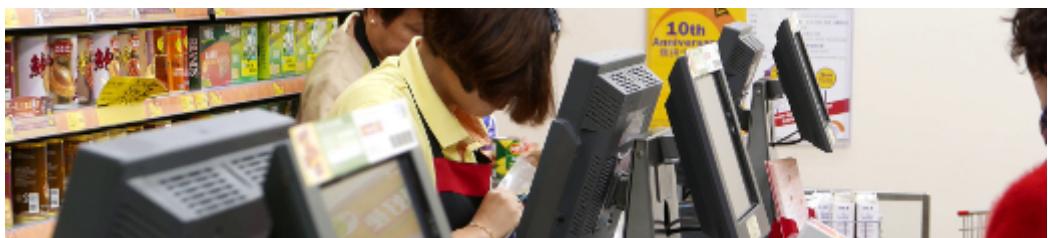

WAREHOUSE AND MANAGEMENT

The industrial panel computer thanks to the RS232 interface can be used to connect many devices in the warehouse and facilitate their control. And its rugged housing is ideally suited to the harsh conditions prevailing in such rooms. No dust or dirt will prevent him from working, he will work without complaints even in a large dusty and dirty environment.



TRANSPORT AND MOTORIZATION

Panel computers can be used in transport by adapting it to work on 12V power supply. Then Panel PC can be used in passenger cars, buses, trams, taxis, trains and even in airplanes. Thanks to the integrated monitor, these

panels perform very well in vehicles where mobility and the small size of the device are important.

Available versions and accessories

Industrial Panel MobiTouch 7RKK4 is offered in several versions adapted to different needs. By clicking on the number of the hardware configuration you will be redirected to the product with the parameters given in the table below. In addition, it is possible to create a configuration that is currently unavailable on the customer's request.