



NoMobi Trex Hi65 v.9.1 - Sunlight-readable totem with a 4K 65-inch touch display - for use at trade fairs - IK10 resistance standard, Android 10 system and online control system

|                              |                                                                          |
|------------------------------|--------------------------------------------------------------------------|
| <b>Category:</b>             | Industrial Outdoor Totems                                                |
| <b>Manufacturer:</b>         | Mobilator                                                                |
| <b>Screen size:</b>          | 65 inch                                                                  |
| <b>Resolution:</b>           | 4K 2160x3840 px                                                          |
| <b>Display manufacturer:</b> | LG                                                                       |
| <b>Picture format:</b>       | 16:9                                                                     |
| <b>Touchscreen:</b>          | Capacitive                                                               |
| <b>CPU:</b>                  | Dual-core ARM Cortex-A72 MPCore + Quad-core ARM Cortex-A53 MPCore 2.0GHZ |
| <b>LAN:</b>                  | 10/100/1000 Mbps/sec Ethernet LAN                                        |
| <b>Bluetooth:</b>            | Yes                                                                      |
| <b>3G:</b>                   | None   (optional)                                                        |
| <b>4G:</b>                   | None   (optional)                                                        |
| <b>Connectors:</b>           | TF Slot   HDMI   USB 2.0   RJ-45                                         |
| <b>Power supply:</b>         | AC100V 240V 50HZ 60HZ                                                    |

|                                     |                                                                                                                                                |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>RAM:</b>                         | <b>4GB</b>                                                                                                                                     |
| <b>Flash memory:</b>                | <b>16GB</b>                                                                                                                                    |
| <b>Disk:</b>                        | -                                                                                                                                              |
| <b>Supported Operating Systems:</b> | <b>Android Android 10</b>                                                                                                                      |
| <b>Installed System:</b>            | <b>Android 10</b>                                                                                                                              |
| <b>Dimensions:</b>                  | 2350mm x 1000mm x 230mm                                                                                                                        |
| <b>Weight:</b>                      | 210kg                                                                                                                                          |
| <b>Optional Equipment:</b>          | -                                                                                                                                              |
| <b>Camera:</b>                      | Built-in top part of the totem                                                                                                                 |
| <b>Speakers:</b>                    | YES - Stereo                                                                                                                                   |
| <b>Working humidity:</b>            | 10 - 90% no condensation                                                                                                                       |
| <b>Working temperature:</b>         | -20°C - 50°C                                                                                                                                   |
| <b>Standby Temperature:</b>         | -20°C - 60°C                                                                                                                                   |
| <b>Resistance standard:</b>         | IP65   IK10                                                                                                                                    |
| <b>Contrast ratio:</b>              | 3000:1                                                                                                                                         |
| <b>Brightness:</b>                  | <b>3500 Nits</b>                                                                                                                               |
| <b>Viewing angle:</b>               | 178/178 degrees                                                                                                                                |
| <b>Color Quantity:</b>              | 10-bit, 1.07 B colors                                                                                                                          |
| <b>Housing material:</b>            | Galvanized sheet metal - powder coated                                                                                                         |
| <b>Fixing / Mounting:</b>           | Screwed to the ground                                                                                                                          |
| <b>Energy consumption:</b>          | 250W                                                                                                                                           |
| <b>Functions:</b>                   | content management external conversion cloud heating system<br>(optional) cooling system LED Light BOX (optional) QR Code reader<br>(optional) |
| <b>Anti-theft protection:</b>       | Anti-theft lock Anti-theft alarm                                                                                                               |
| <b>Transport:</b>                   | <b>Air shipping</b> Sea shipping (option)                                                                                                      |
| <b>Sensors:</b>                     | Dusk sensor                                                                                                                                    |
| <b>Another:</b>                     | Response time in Touch LCD screen - 5ms                                                                                                        |
| <b>Scanner:</b>                     | None   (optional)                                                                                                                              |

**6 853,92 €**

net price: 5 572,29 €

# **NoMobi** **TREX HI65"**

**Outdoor totem  
with IP65 standard**

**android** 



## **TECHNICAL SPECIFICATIONS**

## **FUNCTIONS AND MODULES**

## **PROTECTION AGAINST LOW AND HIGH TEMPERATURES**

## **ANTI-THEFT SYSTEMS**

## **COMMUNICATION**

## **APPLICATION**

## **ACCESSORIES AND AVAILABLE VERSIONS**

The concept of Digital Signage covers an integrated form of system management, which includes electronic displays (digital signs, infokiosks) that present information, advertisements and other messages. Digital signage systems are used, among others, at airports, points of sale or service networks (e.g. tourism companies, real estate, city information, stations, shopping centers, etc.).

SPECIFICATIONS

| NoMobi Trex Hi65  |                                                                          |
|-------------------|--------------------------------------------------------------------------|
| Processor         | Dual-core ARM Cortex-A72 MPCore + Quad-core ARM Cortex-A53 MPCore 2.0GHZ |
| Graphic card      | ARM Mali-T860                                                            |
| Operating system  | Android 10                                                               |
| RAM memory        | 4GB                                                                      |
| ROM memory        | 16GB                                                                     |
| Display           | LG 65" 4K 2160x3840   16:9                                               |
| Touch             | Capacitive                                                               |
| Power consumption | 250W                                                                     |
| Screen brightness | 3500                                                                     |
| Security standard | IP65   IK10                                                              |
| Contrast          | 3000:1                                                                   |
| Input/ Output     | Slot TF   HDMI   USB 2.0   RJ-45                                         |
| Communication     | WiFi BT<br>(Optional: 4G)                                                |

| NoMobi Trex Hi65    |                                               |
|---------------------|-----------------------------------------------|
| Speakers            | YES - Stereo                                  |
| Sensors             | Dusk sensor                                   |
| Dimensions          | 2350mm x 1000mm x 230mm                       |
| Weight              | 210kg                                         |
| Standby temperature | -20°C - 60°C                                  |
| Working temperature | -20°C - 50°C                                  |
| Working humidity    | 10 - 90% no condensation                      |
| Storage humidity    | 5 - 95% no condensation                       |
| Readers             | None   (Optional: Mindeo ES4650 QR Code<br>*) |
| LED Light Box       | None   (Optional: back of device<br>*)        |

\* Optional equipment, available only in specific versions of the device or on request.




The detailed specification of the device is available in the tab "Technical data".

### Dimensions

The panel housing with dimensions of 2350mm x 1000mm x 230mm is made of the highest quality metal covered with a galvanic coating, which ensures a very high resistance of the device to mechanical damage and severe weather conditions, rain, fog, snow and frost. This model, weighing 210 kg, is ready for use at any time, even in difficult conditions such as heat or cold. Digital


Singage Player - Android 65 inch Advertising and information totem NoMobi  
Trex is a series of devices designed for applications requiring continuous  
operation - 24 hours a day, 7 days a week.

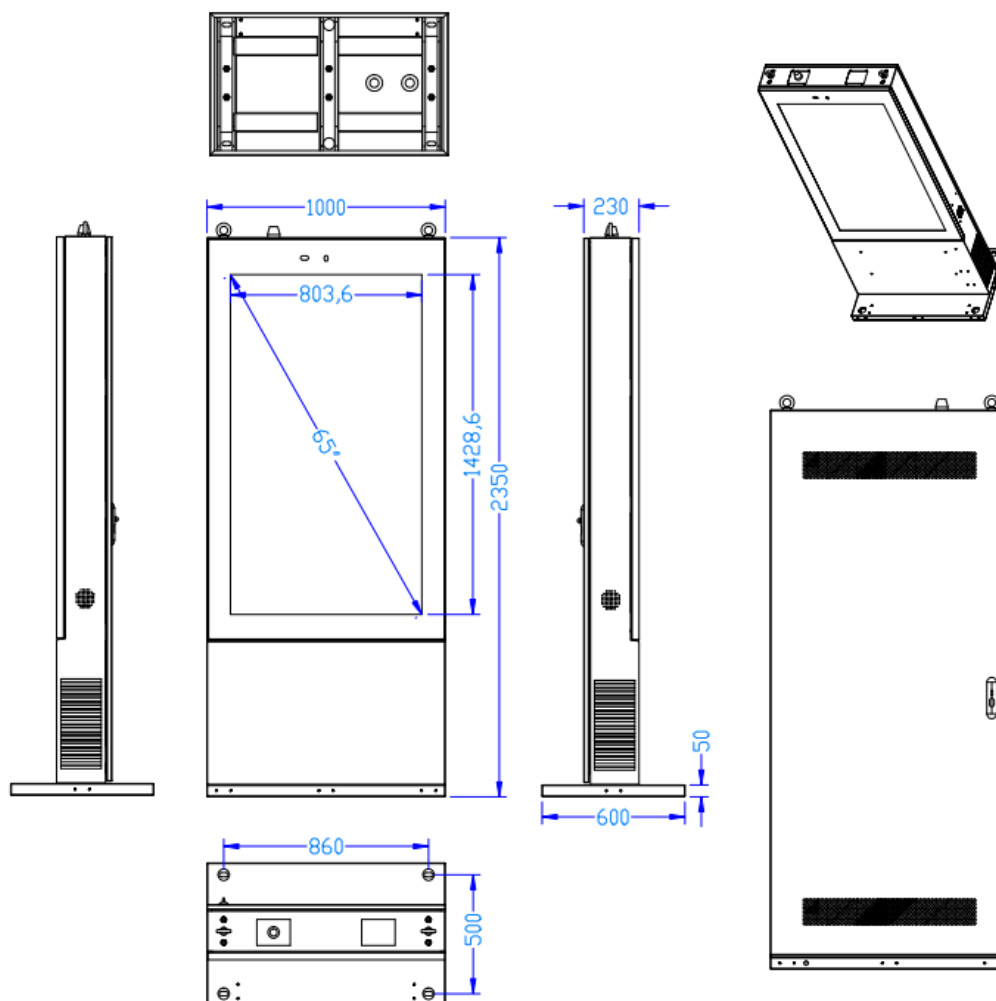

## Szczegóły produktu



Capacitive screen

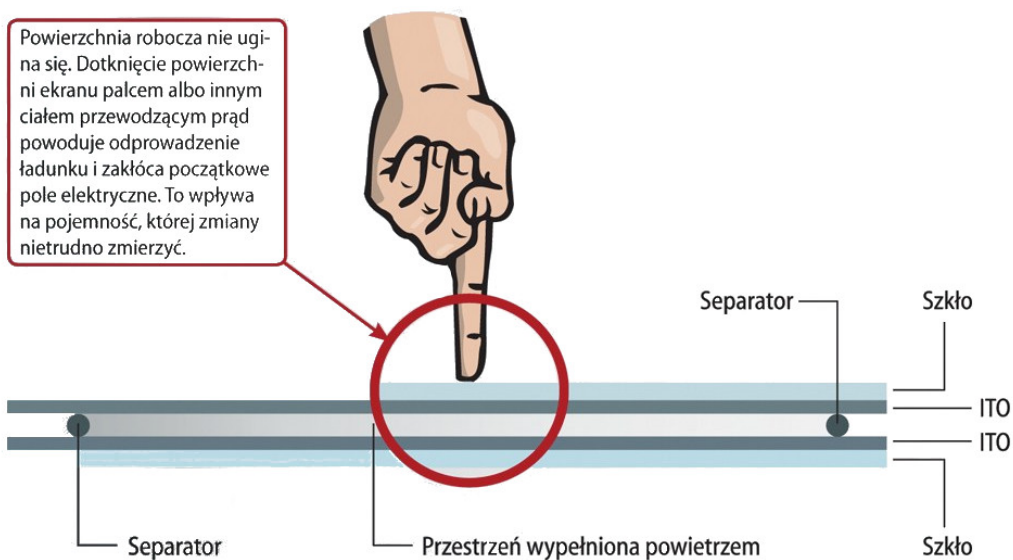

In a capacitive screen, the reaction of the device is not to directly press the surface of the screen, but to change the electrostatic field in the place where the device has been touched. This allows for a much more precise operation and gentle strokes on the screen. In addition, we can use multitouch technology, i.e. the ability to control our totem with several fingers at the same time.

#### LG LCD Display

The external industrial displays use screens from the global manufacturer of LG. These screens are of high quality. The image displayed is very clear and full of color depth.



The screen in advertising totems can have different brightness applied:

| Brightness | Contrast |
|------------|----------|
| 2500 nits  | 3000:1   |

|           |        |
|-----------|--------|
| 3000 nits | 3000:1 |
| 3500 nits | 3000:1 |
| 4500 nits | 4500:1 |
| 5000 nits | 4500:1 |



In order to imagine and compare the brightness of the recommended screen brightness, data on LCD screens in various places have been completed.

| Industry          | Place             | Recommended brightness |
|-------------------|-------------------|------------------------|
| Aviation industry | Departure hall    | 700 – 2,500            |
|                   | Departure gates   | 700 – 2,500            |
|                   | Check-in location | 600 – 2,500            |
| Office            | Corridors         | 350 - 500              |
|                   | Meeting rooms     | 350 - 800              |
|                   | Conference room   | 400 – 1,000            |
|                   | Reception         | 500 – 1,600            |

| Industry         | Place                | Recommended brightness |
|------------------|----------------------|------------------------|
| Office           | 350 - 800            |                        |
| Atrium           | 700- 2,500           |                        |
| Cinema           | Lobby                | 400 – 2,500            |
|                  | Advertisement window | 1,700 – 2,500          |
|                  | Roof                 | 2,500                  |
|                  | Outside              | 2,500                  |
| Education        | Corridor             | 350 - 600              |
|                  | Classroom            | 350 - 800              |
|                  | Auditorium           | 400 – 1,600            |
| Hospital         | Entrance             | 700 – 2,500            |
|                  | Reception            | 500 – 1,600            |
|                  | Stairs/corridors     | 350 - 500              |
| Museum and Sport | Sport hall           | 400 – 1,600            |
|                  | Museum               | 400 – 1,600            |
| Gastronomy       | Restaurant windows   | 1,700 – 2,500          |
|                  | Totem with menu      | 350 - 800              |
|                  | Newsstands           | 500 – 900              |
|                  | Drive-thru menu      | 2,500                  |
| Hospitality      | Outside              | 2,500                  |
|                  | Stall                | 500 – 2,500            |
|                  | Sport hall           | 500 – 1,600            |

| Industry         | Place         | Recommended brightness |
|------------------|---------------|------------------------|
| The retail trade | Outside stall | 1,700 – 2,500          |
|                  | Entrance      | 600 – 1,600            |
|                  | Pharmacy      | 500 – 1,600            |
|                  | Retail store  | 500 – 1,000            |
|                  | Supermarket   | 500 – 900              |
|                  | Rooms         | 600 – 2,500            |

### Dusk sensor

The task of the dusk sensor is to measure the value of illumination around the totem. This sensor adjusts the brightness of the screen to the conditions outside. Thanks to it, the screen is readable on a sunny day and at night. This also affects the consumption of electricity, because the sensor regulates the screen backlight, reducing the amount of electricity consumption. The selection of the appropriate brightness of the screen at night does not blind, for example- road users, if the totem is placed near it.



### 4K screen

The 4K screen provides a unique experience thanks to its high resolution, which is 2160 horizontal pixels and 3840 vertical pixels. This gives a total of about 8.3 million pixels, which will make the image displayed on the screen much more real.



4K totems have four times the pixels of traditional Full HD (1080x1920) displays. Even on screens of the same size, the 4K image becomes more vivid and detailed thanks to the higher pixel density. This difference is especially noticeable with large screen wards. For example, when comparing the quality of a traditional 65-inch Full HD display with a 65-inch 4K screen, we will notice a difference in the pixels that make up the image. In high-resolution devices, pixels are smaller than in screens of the same size but with lower resolution. Thanks to this, we experience intense impressions without restrictions - we watch all the content up close and you do not notice individual pixels.



#### Security certificate IP65

The IP standard determines the degree of protection provided by the housing of an electrical device against such factors as: access to hazardous parts inside the housing, the ingress of foreign solids, as well as splashes or immersion.

|             |                                                                                  |
|-------------|----------------------------------------------------------------------------------|
| <b>IP6X</b> | Protection against access to hazardous parts by wire.<br>Dustproof protection.   |
| <b>IPX5</b> | Protection against water jets (12.5 l / min) poured on the housing from any side |





### Temperature and working humidity

NoMobi Trex is adapted to continuous operation both at very low and high temperatures in the range from  $-20^{\circ}\text{C}$  to  $50^{\circ}\text{C}$ . If the device is turned off, it can cope with temperatures ranging from  $-20^{\circ}\text{C}$  to  $60^{\circ}\text{C}$ . In addition, the durable LCD totem is perfect for conditions with increased humidity, ensuring proper functioning even in the case of 90% relative air humidity.

|                            |                                               |
|----------------------------|-----------------------------------------------|
| <b>Working temperature</b> | $-20^{\circ}\text{C}$ to $50^{\circ}\text{C}$ |
| <b>Storage temperature</b> | $-20^{\circ}\text{C}$ to $60^{\circ}\text{C}$ |

|                         |                            |
|-------------------------|----------------------------|
| <b>Working humidity</b> | 10% do 90% no condensation |
| <b>Storage humidity</b> | 5% do 95% no condensation  |

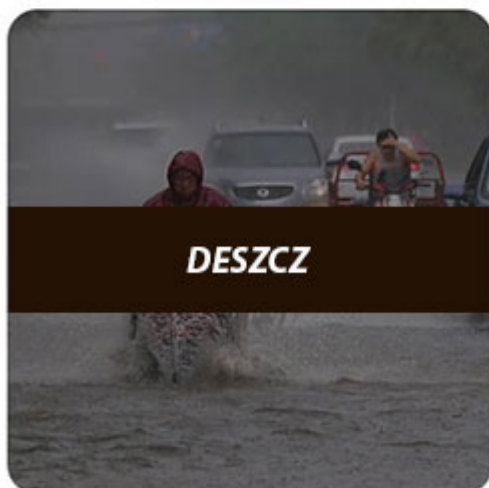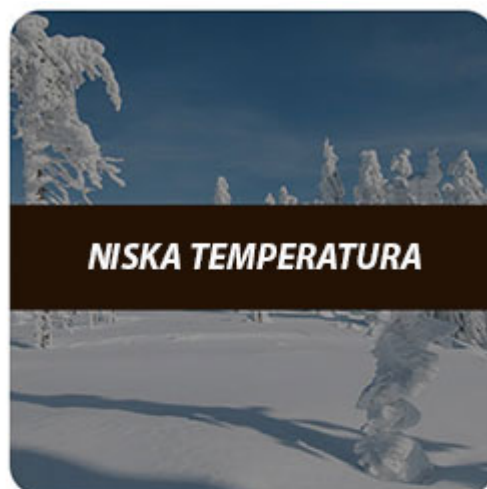

## FUNCTIONS AND MODULES

### Content management

Optionally, the manufacturer also provides specialized software for remote management of the displayed content on the monitors. Thanks to this solution, the user can use one computer to control and update the content on all monitors connected to the network (Wi-Fi, RJ-45 LAN or 4G). The software

also allows you to modify the layout of the displayed information, so that many components can be displayed on the screen at the same time.



- Wymienialny filtr wewnętrzny
- Wyświetlacz statusu błędów
- Zdalna kontrola

**mobikator<sup>TM</sup>.pl**

# Zewnętrzna chmura konserwacyjna

Gdziekolwiek, kiedykolwiek, Cokolwiek

- Monitoring
- Rozwiązywanie problemów
- Samoochrona
- Utrzymywanie ekranu



Below is a photo from the management panel, in which you can control, among others: fan speed, temperature or humidity analyzer.



Barcode scanner (option)



*Skanery kodów 2D*

**MINDEO**

**ES4650**

Barcode Reader allows you to read, decode and transfer stored data in barcode to your computer. Thanks to dynamic scanning method and the large range of reading, device is capable to carefully collecting data, which helps to increase the rate and efficiency of work. Simplified installation procedure, convenient and intuitive design allow to start scanner work very easy and quickly.

**PROTECTION AGAINST LOW AND HIGH TEMPERATURES**

**Heating system**

The optionally installed heating system available in the device ensures the stability of the standing totem by maintaining the same temperature. The mechanism of operation is based on heating the device from a temperature of

e.g.

-30

°C do -10°C, in which the device functions properly. The system is recommended for temperate or transient climates in order to optimize the operation of the standing totem.

#### Cooling system


A heat exchanger is installed in the device to cool the device at high temperatures, so that the outdoor totem can function in heat and sun. The cooling system allows the display to work properly in summer and the ads will be visible. For example, if the device starts to heat up to 60 °C is a mounted fan, by increasing the speed of rotation, the totem will cool down to a temperature below 50°C, thanks to which the device will be able to function properly.



## ANTI-THEFT SYSTEMS

### Anti-theft system and alarm

The outdoor standing totem has an anti-theft lock inside the device. In addition, the panel is screwed through the support to the base with screws, preventing quick disassembly. In addition, the device is equipped with a special alarm.

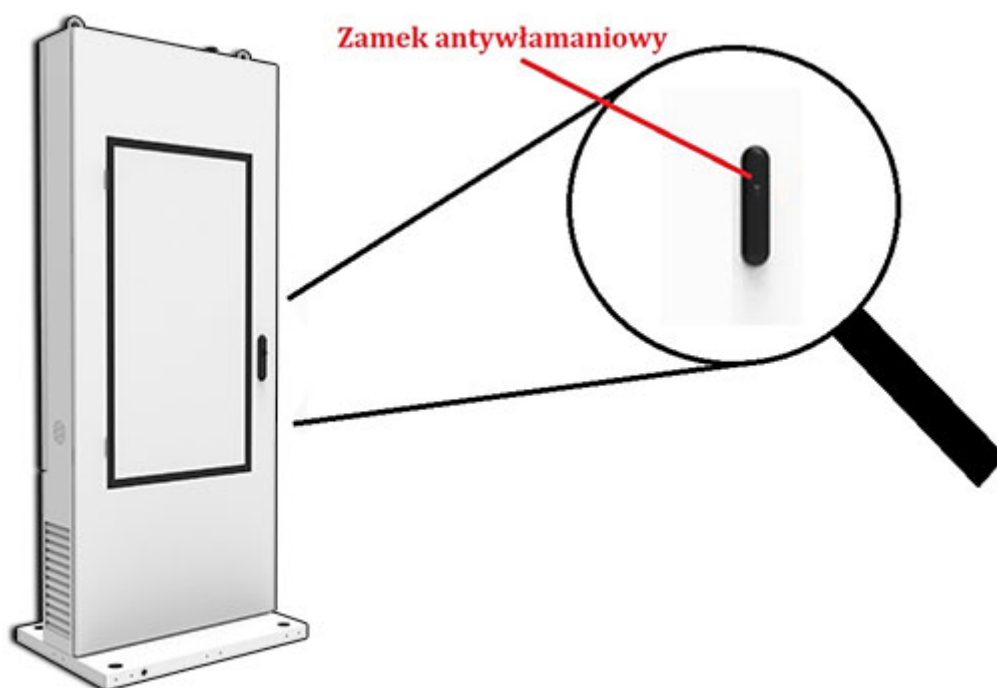

IK10 degree of protection

IK is a mechanical strength classification. It is defined in the European standard EN 62262, as well as its international equivalent, i.e. IEC 62262: 2002. It is used as a parameter that determines how resistant the devices are to impacts and other external mechanical damage, we mean the so-called vandal resistance.

The devices are marked with the letters IK and two numbers - appropriate on an 11-point scale (from "00" to "10"). The higher the numerical value of the IK parameter, the better the level of mechanical strength.

| IK classification level | Impact force                                |
|-------------------------|---------------------------------------------|
| 10                      | Resistance to impact with an energy of 20 J |

## COMMUNICATION

4G (optional)

The standing totem with an LCD screen is equipped with a WiFi module, optional 4G. In addition, the totem has a module that allows you to track the position.



#### Wireless Wi-Fi network

The dual-band Wi-Fi module provides quick network access wherever you can connect to secured or open Wi-Fi networks. It is a convenient solution for people who have a router and a wireless network in their place of work or residence, which can be used at no additional charge. The device has been equipped with the latest standard of this technology - 802.11n, which allows you to transfer files at dizzying speeds up to 150 Mb / s.

|                    |                         |
|--------------------|-------------------------|
| <b>Standards</b>   | 802.11(b/g/n)           |
| <b>Frequencies</b> | 2.4G + 5.8G (Dual-Band) |

## LED Light Box (optional)

The LED Light Box is a translucent surface illuminated from the back by LED lights, used in situations where the shape located on the surface must be visible with high contrast. It can be located on the rear flap of the device. You can place an advertisement or information there, which will also be visible at night thanks to the backlight.

## APPLICATION



NoMobi Trex is a modern, dynamic form of advertising and interactive matrix that allows you to stand out from the competition and arouse interest among recipients traveling by car, bicycle or walking. This solution enables remote control of the network of monitors from one central device. In addition, it is possible to integrate such a device with the company's database applications, which allows for full automation of displayed messages, thanks to this solution the recipient always has access to up-to-date data. Despite being a

relatively new form of communicating information, NoMobi Trex is slowly but surely replacing older, static forms of advertising such as posters, banners, banners, leaflets or interactive panels in restaurants.



Wards come in many different forms and can be used for almost any purpose. We can find advertising monitors at places such as airports, shops, hotels, service establishments, shopping centers, stations, restaurants, tourist offices and in other smaller or larger companies. Their use will certainly attract the customer's attention, introduce an atmosphere of modernity and originality to your business, and allow you to stand out from other corporations.

Thanks to its versatility and durability, NoMobi Trex can be easily adapted to any type of business and can fulfill its functions in difficult weather conditions. Examples of places and ways of using systems of this type are:

#### Trade and services

The retail industry is the main recipient of this type of devices, NoMobi Trex can be used here to present prices, products, build a brand, inform about

promotions or direct traffic to the facility with the selected product. Touch kiosks or LCD totems can also be used to interact with the client. The optional touch screen allows you to create responsive catalogs, thanks to which people can better familiarize themselves with the displayed offer.



### Hospitality and gastronomy

In such places, NoMobi Trex can be used not only for commercial purposes, but also for informational purposes, such as menu presentation, service promotion, information about available rooms, room reservations, etc. Standing totems can be an alternative to placing gastronomic orders in Drive-type restaurants. Thru.



## Industry

In places related to the industry, standing totems can display order boards, production information, information for employees, as well as monitor devices, keep execution lists. Tactile NoMobi Trex can be used to organize interactive fire, health and safety and other tests.




### Offices and institutions

Here, just like in the industry, totem systems mainly perform information functions, they can display messages, notifications, but also present advertisements (e.g. job offers) or even help with customer service. They turn out to be a convenient alternative to interpersonal contacts, where an external standing totem can help with performing certain functions or obtaining data sought by people.



## Education

In places of study, NoMobi Trex create a modern information network displaying a message about, for example, a certain research facility. The possibility of a touch screen means that pupils, students and other groups of people can easily learn more about bothering and interesting topics.

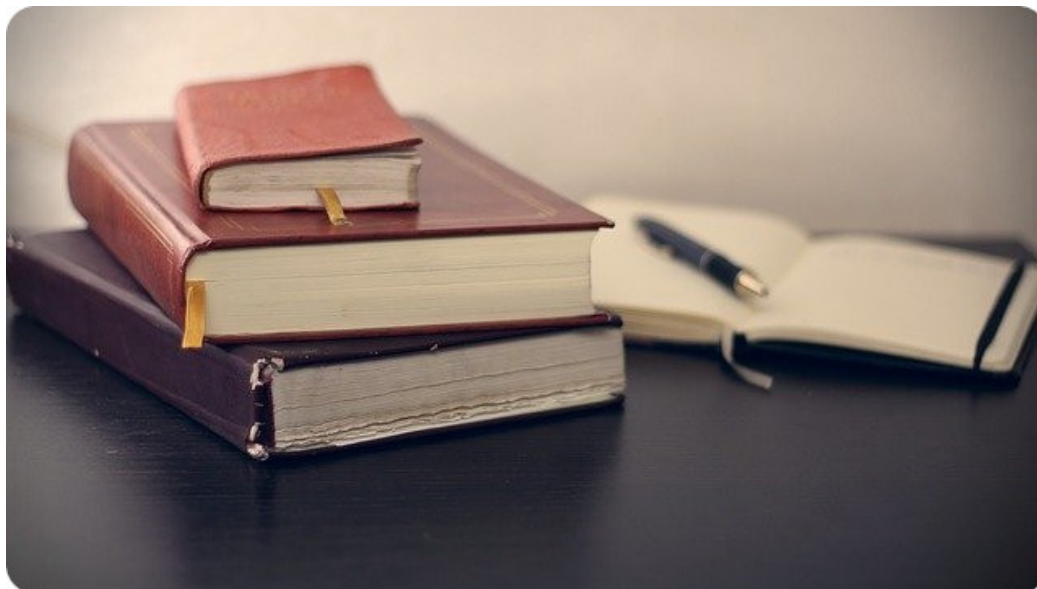

## AVAILABLE VERSIONS

The NoMobi Trex standing totem is offered in several versions tailored to different needs. By clicking on the number of the hardware configuration you will be redirected to the product with the parameters given in the table below. In addition, at the customer's request, it is possible to create a configuration currently unavailable in the offer.



More photos of the device are available in the tab [Gallery](#).

|                       | v.1    | v.2    | v.3   | v.4   | v.5   | v.6   | v.7   | v.8   | v.9   | v.10  |
|-----------------------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| 2500 nits             |        | —      | —     | —     | —     |       | —     | —     | —     | —     |
| 3500 nits             | —      |        | —     |       | —     | —     |       | —     |       | —     |
| 4500 nits             | —      | —      |       | —     |       | —     | —     |       | —     |       |
| 4G                    | —      | —      |       | —     |       | —     | —     |       | —     |       |
| 4K                    | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     |
| Screen touch          | —      | —      | —     |       |       | —     | —     | —     |       |       |
| Mindeo ES4650 QR Code | —      | —      | —     | —     | —     | —     | —     | —     | —     | —     |
| Sea transport         |        |        |       |       |       | —     | —     | —     | —     | —     |
| Air transport         | —      | —      | —     | —     | —     |       |       |       |       |       |
|                       | v.1.1  | v.2.1  | v.3.1 | v.4.1 | v.5.1 | v.5.2 | v.6.1 | v.7.1 | v.8.1 | v.9.1 |
| 2500 nits             |        | —      | —     | —     | —     | —     |       | —     | —     | —     |
| 3500 nits             | —      |        | —     |       | —     | —     | —     |       | —     |       |
| 4500 nits             | —      | —      |       | —     |       |       | —     | —     |       | —     |
| 4G                    | —      | —      |       | —     |       |       | —     | —     |       | —     |
| 4K                    |        |        |       |       | —     |       |       |       |       |       |
| Screen touch          | —      | —      | —     |       |       |       | —     | —     | —     |       |
| Mindeo ES4650 QR Code | —      | —      | —     | —     |       |       | —     | —     | —     | —     |
| Sea transport         |        |        |       |       |       |       | —     | —     | —     | —     |
| Air transport         | —      | —      | —     | —     | —     | —     |       |       |       |       |
|                       | v.10.1 | v.10.2 |       |       |       |       |       |       |       |       |
| 2500 nits             | —      | —      |       |       |       |       |       |       |       |       |
| 3500 nits             | —      | —      |       |       |       |       |       |       |       |       |
| 4500 nits             |        |        |       |       |       |       |       |       |       |       |
| 4G                    |        |        |       |       |       |       |       |       |       |       |
| 4K                    |        | —      |       |       |       |       |       |       |       |       |
| Screen touch          |        |        |       |       |       |       |       |       |       |       |
| Mindeo ES4650 QR Code | —      |        |       |       |       |       |       |       |       |       |
| Sea transport         | —      | —      |       |       |       |       |       |       |       |       |
| Air transport         |        |        |       |       |       |       |       |       |       |       |