



Digital Singage Player - Android 13.3 inch Touch Panel PC MobiPad HDY133W-T

Category:	Industrial Panel PC Computers
Manufacturer:	Mobikator
Screen size:	10.1"
Resolution:	1080 x 800
Aspect ratio:	16:10
Touchscreen:	Capacitive
Chipset:	-----
CPU Support:	Quad Core ARM Cortex A9 1.6GHzQuad Mali 400 533Mhz (Mali400MP4)
Installed CPU:	Quad Core ARM Cortex A9 1.6GHzQuad Mali 400 533Mhz (Mali400MP4)
Memory Support:	-----
Installed Memory:	2GB DDR3
Graphic Card:	-----
Audio:	-----
Storage (HDD) Support:	-----
Installed Storage (HDD):	16GB Flash
CD/DVD Drive:	-----
LAN:	Yes
Wireless LAN card:	Yes
Bluetooth:	-----

3G:	-----
GPS:	-----
TV Tuner:	-----
Watch Dog Timer:	-----
Ports - front panel:	-----
Ports - rear panel:	1x Mini USB3x USB 2.01x RJ-451x SD1x Power Jack1x Audio Jack
Ports - left panel:	-----
Ports - right panel:	-----
Power:	12V DC-in
Supported OS:	Android
Installed OS:	Android 7.1.2
Dimensions:	262mm x 172mm x 24.5mm
Weight:	520g
Expansion:	-----
Fanless:	No
Humidity:	10%~ 80%
Temp:	-10°C ~ 60°C
Storage Temp:	-20°C ~ 60°C
IP Norm:	-----
IP Level (back panel):	-----
IP Level (front panel):	-----
Dual display:	Yes
Response time touch-panel (ms):	-----
Contrast Ratio:	1000:1
Brightness:	350cd/m2
Viewing Angle:	89°/89°/89°/89°
Backlight MTBF:	LED
Color Resolution:	-----


Surface hardness (display):	-----
Touch Life(contacts):	-----
Housing material:	High quality plastic
Mounting VESA:	-----
Folding Bracket (for office type working):	-----
Power Consumption:	20W
Others:	Housing color: Black
Anti-vibration:	-----
Anti-shock:	-----
RFID scanner (reader):	-----
Barcode reader:	-----

Product from the Archive - production finished



**Digital Singage Player
MobiPad 101HDY-TP**

- 10" 10.1 inch**
- Screen Ratio 16:10**
- Resolution: 1080x800**
- LED Backlight**
- Capacitive**

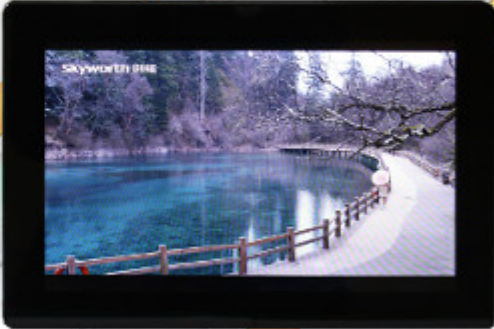

Industrial Panel PC

Industrial Panel PC are excellent in environments dominated by dust, dirt and moisture. They are ideal for applications that require quiet operation.

[go top...](#)



MTouch

Digital Singage Player MobiPad 101HDY

MTouch



Panel PC



CPU: Quad Core ARM Cortex A9 1.6GHz



Memory: 2GB RAM DDR3



Disk: 16GB Flash



System: Android 7.1.2



Screen: 10.1" / 1080x800 / 16:10 / Capacitive



Expansion cards: none

Detailed specification of the configuration available in the **"Technical data"**

Using the latest technology, Panel PC is designed for continuous multitasking operating with low power consumption. An important advantage is the effective combination of small size with considerable opportunities, through the use of **ARM Cortex A9** processor family and **DDR3** memory. Integrated video graphics card and audio allow you to play a wide range of

New Portable Devices | NIP: 872-120-56-82 | Mobile: +48 508 235 505 | e-mail: sklep@mobikator.pl

Account number: ALIOR BANK SA 68 2490 0005 0000 4500 2328 8078

[go top...](#)

Communication:

Operator Panel Digital Singage Player MobiPad 101HDY standard has a system of wireless Wi-Fi communication. Optionally in other models are available also modules such as 3G.



Connector:

Integrated network card and **Wi-Fi** module allows you to connect the device to the network. The computer is equipped with: one **LAN** connector, three **USB** ports, one **Mini USB** port, one **SD card** slot, four **USB 2.0** ports, one **audio** out and a **Power Jack**.




1. Karta SD
2. USB 2.0
3. Mini USB
4. Power Jack

5. USB 2.0
6. RJ-45
7. USB 2.0

Operator Panel Digital Singage Player MobiPad 101HDY has a scratch resistant LED screen. With 1080x800 resolution and high brightness of 350cd/m2, screen of capacitive type with high sensitivity to touch, offers the user a clear picture and ease of use.

MTouch

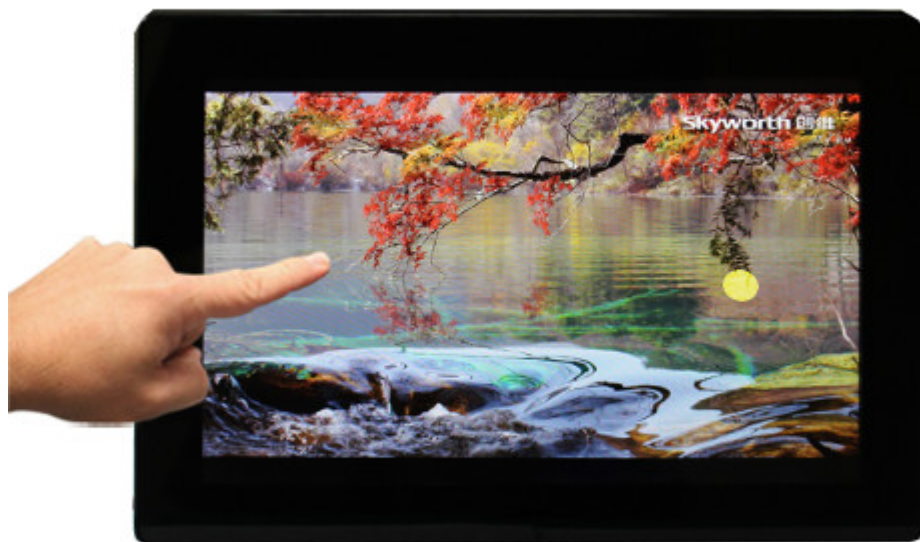

Capacitive

[mobilator.pl](#)

Capacitive screen

Operation of this type of screen is a bit more complex than the resistive screens, but the comfort of their use is much higher. In the corners of the screen capacitive electrodes are placed emitting weak electric field. If you touch the display, the intensity produced before the field changes, and the system will calculate respectively, where the disturbance occurred.



