

## MobiScan FingerRing FS1D-Alar



### Fingering FS1D-Alar - mini barcode scanner 1D Laser - Ring - Bluetooth



<b>Category:</b>	Mobile 1D/2D barcode scanner
<b>Manufacturer:</b>	Mobilator
<b>Supported Operating Systems:</b>	Android, iOS, Windows CE, Windows XP, Windows 7, Windows 8, Windows 10, Linux, MAC
<b>Internal memory:</b>	512KB
<b>Operation Voltage:</b>	3.7V - 120mA - DC
<b>Battery:</b>	380 mAh Li-ion
<b>Reading indicator:</b>	1D Laser
<b>Scan rate:</b>	120 times/sec
<b>Light source:</b>	Laser Diod 650 nm
<b>Resolution:</b>	-
<b>Communication distance:</b>	20-40m
<b>Readable codes:</b>	2 of 5 Industrial, 2 of 5 Interleaved, 2 of 5 Matrix Codabar - NW7 Code - 11 Code - 11(USD-8) Code - 32 Code - 39 Code - 39 Extended (full ASCII) Code - 39 Trioptic&#65292
<b>Readable codes:</b>	2 of 5 Industrial, 2 of 5 Interleaved, 2 of 5 Matrix Codabar - NW7 Code - 11 Code - 11(USD-8) Code - 32 Code - 39 Code - 39 Extended (full ASCII) Code - 39 Trioptic&#65292
<b>Sensor:</b>	Laser Diod 650 nm
<b>Scan Angle:</b>	50°, 65°, 35°(Skew,Pitch,Roll)

<b>Print Contrast Ratio:</b>	>20%
<b>Scan range:</b>	BASED ON CODE 39 3.9mil:25mm-112mm; 10mil:31mm-420.5mm; 20mil:43mm-495mm; 30mil:64mm-537mm; 35mil:145mm-604mm
<b>Cable Type:</b>	MicroUSB
<b>Battery Life:</b>	4 h continuously working
<b>Communication:</b>	Bluetooth 4.0 receiver Bluetooth 3.0 inside scanner
<b>Interface/ Prole:</b>	HID/ SPP
<b>Operating Temperature:</b>	0°C ~ 50°C
<b>Storage Temperature:</b>	-20°C ~ 60°C
<b>Relative Humidity:</b>	5% ~ 90%, non-condensing
<b>Resistance IP:</b>	IP 54
<b>Drop test:</b>	Multiple drops 2.62ft. / 0.8m
<b>Barcodes 1D:</b>	<b>Barcodes 1D:</b>
<b>2 of 5 Chinese:</b>	<b>Yes</b>
<b>2 of 5 Discrete:</b>	<b>Yes</b>
<b>2 of 5 IATA:</b>	No
<b>2 of 5 Industrial:</b>	No
<b>2 of 5 Interleaved:</b>	<b>Yes</b>
<b>2 of 5 Matrix:</b>	No
<b>2 of 5 Standard:</b>	No
<b>BC - 412:</b>	No
<b>Bookland EAN:</b>	<b>Yes</b>
<b>Codabar:</b>	<b>Yes</b>
<b>Codabar - NW7:</b>	No
<b>Code - 11:</b>	<b>Yes</b>
<b>Code - 11(USD-8):</b>	No
<b>Code - 32:</b>	<b>Yes</b>
<b>Code - 39:</b>	<b>Yes</b>
<b>Code - 39 Extended (full ASCII):</b>	<b>Yes</b>

<b>Code - 39 Trioptic :</b>	<b>Yes</b>
<b>Code - 93:</b>	<b>Yes</b>
<b>Code - 128 (A, B, C):</b>	<b>Yes</b>
<b>EAN-8:</b>	<b>Yes</b>
<b>EAN-13:</b>	<b>Yes</b>
<b>EAN -128 / UCC-128:</b>	<b>Yes</b>
<b>GS1 DataBar:</b>	No
<b>Intelligent Mail:</b>	No
<b>ISBN:</b>	No
<b>ISBT - 128:</b>	<b>Yes</b>
<b>ISSN:</b>	No
<b>ITF-6:</b>	No
<b>ITF-14:</b>	No
<b>KIX code:</b>	No
<b>Matrix 25:</b>	No
<b>MSI:</b>	<b>Yes</b>
<b>MSI - Plessey:</b>	No
<b>Pharmacode - One Track:</b>	No
<b>Pharmacode - Two Track:</b>	No
<b>Planet:</b>	No
<b>Plessey:</b>	No
<b>Post - Australian (4-State Postal Code):</b>	No
<b>Post - China (4-State Postal Code):</b>	<b>Yes</b>
<b>Post - Japanese (4-State Postal Code):</b>	No
<b>Post - Singapore (4-State Postal Code):</b>	No
<b>PostNET:</b>	No
<b>Royal Mail (RM-4SCC):</b>	No
<b>Telepen Code:</b>	No

<b>UK/Plessey:</b>	No
<b>UPC - A:</b>	Yes
<b>UPC - E:</b>	Yes
<b>UPC - E1:</b>	Yes
<b>Barcodes 2D:</b>	<b>Barcodes 2D:</b>
<b>Aztec:</b>	No
<b>Composite code:</b>	No
<b>DataMatrix:</b>	No
<b>MaxiCode:</b>	No
<b>Micro PDF 417:</b>	No
<b>Micro QR Code :</b>	No
<b>PDF 417:</b>	No
<b>QR Code :</b>	No
<b>RSS:</b>	No
<b>TLC-39:</b>	No
<b>Housing material:</b>	ABS+PC
<b>Dimensions:</b>	51.8 x 48.3 x 33.9 mm
<b>Weight:</b>	79g (include battery)

**Product from the Archive - production finished**

# FingerRing FS1D-Alar



The company's **MobiScan** new distribution of Mobilator. Company achieved an excellent reputation as a manufacturer of bar code scanners. Due to the high position of the products in the high-tech won the trust of many customers around the world.

**MobiScan**

The bar code scanner is a device that allows read with barcodes from boxes or devices. Business accessories MobiScan produktu guarantee high quality and serve for many years without any loss of quality.



**mobilator.pl**

#### Fingering FS1D-Alar - mini barcode scanner 1D Laser - Ring - Bluetooth

Barcode scanner	1D Laser
Working time	4 h continuously working
Support system	Android, iOS, Windows CE, Windows XP, Windows 7, Windows 8, Windows 10, Linux, MAC
Range	20 - 40 m
Communication	Bluetooth 3.0
Dimensions	51.8 x 48.3 x 33.9 mm
Weight	79g
Other	Adapter Bluetooth 4.0

The detailed specification of the configuration available in the **"Technical data"**

[go top . . .](#)

MobiScan Fingering FS1D-Alar is small size and powerful new generation barcode scanner. Its design for picking and sorting application, enable your operator to free hand and improve operational efficiency in your warehouse, distribution center and retail store. You never need setting an item down to check paper work order or picking up handheld scanner. Operator even no need to put heavy package to the desktop for scan, it will save more time and physical strength. Compare with common wired handheld scanner, FS1D-Alar wearable scanner can increase 15% -30% productivity!


Intelligent and ergonomic, handheld barcode reader will facilitate the work of magazynierom, mobile and stationary retailers, pharmacists, couriers and logistics, quality controllers and inspectors of manufacturing processes and all those who need to work cataloging and storing the information read from the barcode.

1D Barcode Scanner - Fingering FS1D-Alar through Bluetooth module (which provides reliable communication) is compatible with mobile devices, data collectors and computers running on different operating systems (see the text "Communication" - below).



The scanner enables operator to move package, products and materials, helping to increase more efficiency. It is very comfortable to wear it in whole working day, with high performance laser scan engine, even poor printed barcodes can be read. The rugged rubber shell makes daily use reliable even in the roughest environments.

Equipped with a battery with sufficient capacity 380mAh, which allows the scanner to work about four hours in scan mode (continuously working).

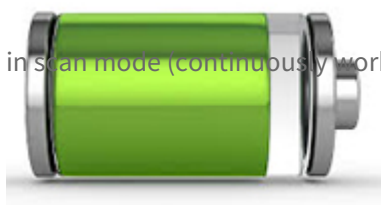

[go top . . .](#)



-1D barcode reader that connecting via Bluetooth with your device. It provides information such as the name of the product, the type, approximate value, availability, and also allows for quick and convenient automatic grouping of data.





Designed to be tailored to different applications, wireless (Bluetooth) barcode scanner can be compatible with Android, iOS, Windows CE, Windows XP, Windows 7, Windows 8 and Linux. Users can send data directly to a PC or in real time to mobile devices.



Portable (radio and bluetooth-aid) barcode readers using laser technology are comfortable and easy to use, with wide possibilities to set parameters. Enable automatic operation and manual. Read codes with different contrasts with a distance of several centimeters. The use of wireless communication (Bluetooth or radio) offer a range of up to 20m from the computer.

**The device uses the HID interface**

To scanner devices need to use the right software to a serial port (RS-232) collect data and display them in window of the user. The scanner is connected to the USB port and working in the so-called POS mode needs further appropriate driver, which once installed in the system creates a virtual port number specified - the so-called virtual COM port driver.

Most of the users is a (mistaken) belief that each scanner connected to a computer will send data, which can be further processed such as Notepad or MS Word. That's not true. To do so, use the scanner with the so-called keyboard emulation - connected to a computer via USB, but it must be working in a standard USB HID (**Human Interface Device**) otherwise known as Low Speed USB disc. In this way the data is sent to the computer in exactly the same way as does a USB keyboard. Hence the term emulation keyboard.




## Compliance standards and tests performed

Work	0° do 50°C
Humidity	5% do 90% (No condensation)
Dust	IP5x (dust)
Water	IPx4 (Water splashes)
Drop	Multiple Drop 2,62ft./0.8m



## Resistance IP54

Degrees of IP is a classification of different degrees of protection of electrical equipment that are provided by enclosures of the unit according to PN-92/E-08106. A number after the "IP" is really two digits. The first is protection of human and animal access to hazardous parts and protection against contamination, such as dust. It's mainly about access foreign objects to enter the unit. The second digit is protection against water.

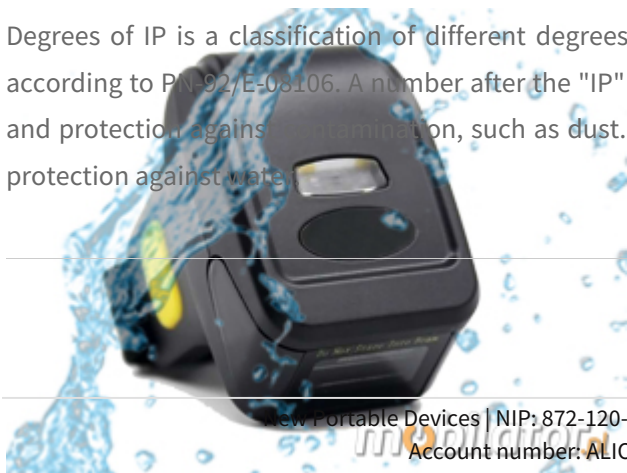

**The first digit [x]**  
Protection against solid objects

No special protection

0



Protection from solid objects greater than 50mm in diameter

1




Protection from object not greater than 12mm in diameter

2




Protection from object not greater than 2,5mm in diameter

3



Protection from object not greater than 1mm in diameter

4




Complete protection against contact, Protection against dust deposit

5



Complete protection against contact, Protection from infiltration of dust

6



**The second digits [y]**

Protection against liquids

0

No waterproofing

1

Protection from dripping water

2

Protection from vertically dripping water (tilted)

3

Protection from sprayed water (tilted up to 60°)

4

Protection from splashed water

5

Protection from water projected from a nozzle

6

Protection against heavy seas, or powerful jets

7

Protection against immersion

8

Protection against complete, continuous submersion



<b>v.0</b>	<b>v.0</b>	<b>v.0</b>	<b>v.0</b>	<b>v.0</b>	<b>v.0</b>	<b>v.0</b>	<b>v.0</b>	<b>v.0</b>	<b>v.0</b>
------------	------------	------------	------------	------------	------------	------------	------------	------------	------------

—	—	—	—	—	—	—	—	—	—
---	---	---	---	---	---	---	---	---	---

<b>v.0</b>	<b>v.0</b>	<b>v.0</b>	<b>v.0</b>	<b>v.0</b>	<b>v.0</b>	<b>v.0</b>	<b>v.0</b>	<b>v.0</b>	<b>v.0</b>
------------	------------	------------	------------	------------	------------	------------	------------	------------	------------

—	—	—	—	—	—	—	—	—	—
---	---	---	---	---	---	---	---	---	---

<b>v.1</b>	<b>v.2</b>	<b>v.3</b>
------------	------------	------------

—	—	—
---	---	---