



Industrial Touch Panel Computer ITPC-A101 v.4

| | |
|---------------------------------|-------------------------------|
| Category: | Industrial Panel PC Computers |
| Manufacturer: | Mobilator |
| Screen size: | 10.1" |
| Resolution: | 1280 x 800 |
| Aspect ratio: | ----- |
| Touchscreen: | Capacitive |
| Chipset: | Intel Celeron |
| CPU Support: | Intel Celeron J1900 (4x 2GHz) |
| Installed CPU: | Intel Celeron J1900 (4x 2GHz) |
| Memory Support: | DDR3L SO-DIMM (max. 8GB) |
| Installed Memory: | 8GB |
| Graphic Card: | Intel HD Graphics |
| Storage (HDD) Support: | SSD |
| Installed Storage (HDD): | 128 GB |
| CD/DVD Drive: | ----- |

| | |
|------------------------------------|---|
| LAN: | Realtek RTL8111E 10/100/1000 Mb/s |
| Wireless LAN card: | Intel 6205 Dual-Band 802.11 a/b/g/n |
| Bluetooth: | No |
| 3G: | No |
| TV Tuner: | ----- |
| Watch Dog Timer: | ----- |
| Ports - front panel: | ----- |
| Ports - rear panel: | 1x USB 3.01x USB 2.02x RS2322x Gigabit LAN1x VGA1x HDMI1x Mic1x AudioDC 12V |
| Power: | 12V DC-in |
| Supported OS: | Windows 7/8.1/10 Linux |
| Installed OS: | ----- |
| Dimensions: | 260.5mm x 178mm x 38 mm |
| Weight: | 1.4 kg |
| Expansion: | ----- |
| Fanless: | No |
| Humidity: | 0%~ 95% |
| Temp: | -10°C ~ 50°C |
| Storage Temp: | -20°C ~ 60°C |
| IP Norm: | ----- |
| IP Level (back panel): | ----- |
| IP Level (front panel): | ----- |
| Contrast Ratio: | 1000:1 |
| Brightness: | 350 cd/m2 |
| Viewing Angle: | Full |
| Backlight MTBF: | LED |
| Color Resolution: | ----- |
| Surface hardness (display): | ----- |
| Touch Life(contacts): | ----- |

| | |
|---|-------------|
| Housing material: | Aluminium |
| Mounting VESA: | Yes |
| Folding Bracket (for office type working): | ----- |
| Power Consumption: | ----- |
| Others: | Color Black |
| Anti-vibration: | ----- |
| Anti-shock: | ----- |

3 203,90 zł

net price: 2 604,80 zł



SPECIFICATION AND PARAMETERS

DISPLAY AND TOUCH

RESISTANCE AND PROTECTION

COMMUNICATION AND CONNECTORS

APPLICATION

AVAILABLE VERSIONS AND ACCESSORIES

Industrial PC panels are integrated devices consisting of a PC computer and a touch monitor. Due to their design, they can work even under severe conditions prevailing in industrial environments, such as high humidity, high dustiness, contact with water or very low or high temperatures. These panels are characterized by high efficiency and stability of operation in all conditions.



Passive cooling

Use of passive cooling in the PC panel ensures silent operating and slows down deposition of dust.



Quick start

A modern SSD drive will increase the speed of applications and programs and ensure quiet computer operation.



Efficient

The quad-core Intel Celeron processor supported by 4 or 8 GB of RAM improves the device's performance.



Bright Screen

The display with 300 cd/ m² brightness makes the picture much more vivid and better readable when used outside in the sun.



Wireless network



Capacitive screen

The panel can be connected to nearby wireless networks by equipping it with an optional Wi-Fi module.

The capacitive screen allows precise handling and gentle on-screen movement.

Specifications and parameters

| Performance | |
|------------------|-------------------------------|
| Processor | Intel Celeron J1900 (4x 2GHz) |
| Graphics card | Intel HD Graphics |
| Operating system | Windows 7/8/10/CE Linux |
| RAM | 8GB DDR3L |
| Drive | SSD: 128 GB |
| Display | |
| Screen | 10.1" (1280 x 800) |
| Touch screen | Capacitive, 10 point |
| Brightness | 350cd/m ² |
| Screen ratio | 16:10 |
| View angle | Full |

| Display | |
|-----------------------|--|
| Touch screen lifetime | Over 50 million touches |
| Interfaces | |
| Communication | Wi-Fi |
| Connectors | 1x USB 3.0 1x USB 2.0 2x RS232 2x Gigabit LAN 1x HDMI 1x Mic 1x Audio DC 12V |
| Other | |
| Dimensions | 260.5 x 178 x 38mm |
| Weight | 1.4 kg |
| Casing material | Aluminum alloy |



Detailed device specification is available in the "Technical data" tab.

The dust-proof industrial PC panel uses an efficient and energy-saving Intel Celeron J1900 processor. In its interior there are two cooperating cores enabling more efficient processing of many tasks at the same time. Shared cache memory in which a multi-level hierarchy is used is dynamically allocated to each processor core depending on the load. This reduces the average access time to the main memory. Improved graphics card technology allows you to enjoy movies at full resolution and HD quality.





More photos in full resolution available in the "Gallery" tab.

Display and touch

Amplified, waterproof industrial computer ITPC A101 has a water-resistant and scratch-proof 10.1" LED screen 1280x800 resolution offers good image quality, and high brightness in the 350 cd/m² range gives better color saturation and contrast and allows significantly improved visibility even in the case of incident. The display of the resistive type provides the user with a clear image and ease of use by touch.

CAPACITIVE SCREEN

The capacitive screen consists of a glass coating that is covered with an insulator. Touching the surface of the touch pad with your finger causes a disturbance in the flow of electric current. This display provides very good visibility under industrial conditions. The panel can be operated with one finger or conductive material (special glove). This type of screen provides support for multi-touch technology, which is a clear convenience during work. This is due to the fact that a large number of electrodes allows accurate detection of many points of touch. You do not have to use a stronger pressure for capacitive screens, because you only need to lightly brush the screen with

your finger to make the device react.



Resistance and protection

QUALITY OF MATERIALS

Panel PC has a high quality casing made from aluminum alloys. It is a very crucial component of cooling system thanks to openings allowing air flow inside casing, specially important in a passive system. Overall design concentrates on simplicity and functionality which are in high demand amongst professionals.



EXTREME TEMPERATURES

PanelPC ITPC A101 is adapted for continuous operation in both very low and high temperatures in the range from -10 ° C to 50 ° C. If the device is switched off, it can already handle temperatures between -20 ° C and 60 ° C. In addition, the durable PanelPC is perfect for rooms with increased humidity, ensuring proper functioning even in the case of 95% relative humidity.

| | |
|---------------|---------------|
| Work temp. | -10°C do 50°C |
| Storage temp. | -20°C do 60°C |
| Humidity | 0% - 95% |


Communication and connectors

(OPTIONAL) WIRELESS WI-FI NETWORK

The dual-band Wi-Fi module provides quick access to the network wherever you can connect to secured or open Wi-Fi networks. This is a convenient solution for people who have a router at home or place of residence and a wireless network that can be used at no extra charge. The shockproof industrial panel ITPC A101 has been equipped with standards - 802.11n, which allows transfer of files at a dizzying speed of up to 150 Mb/s.

| | |
|-------------|---------------|
| Standards | 802.11a/b/g/n |
| Frequencies | 2.4GHz 5GHz |

CONNECTORS AND INTERFACES

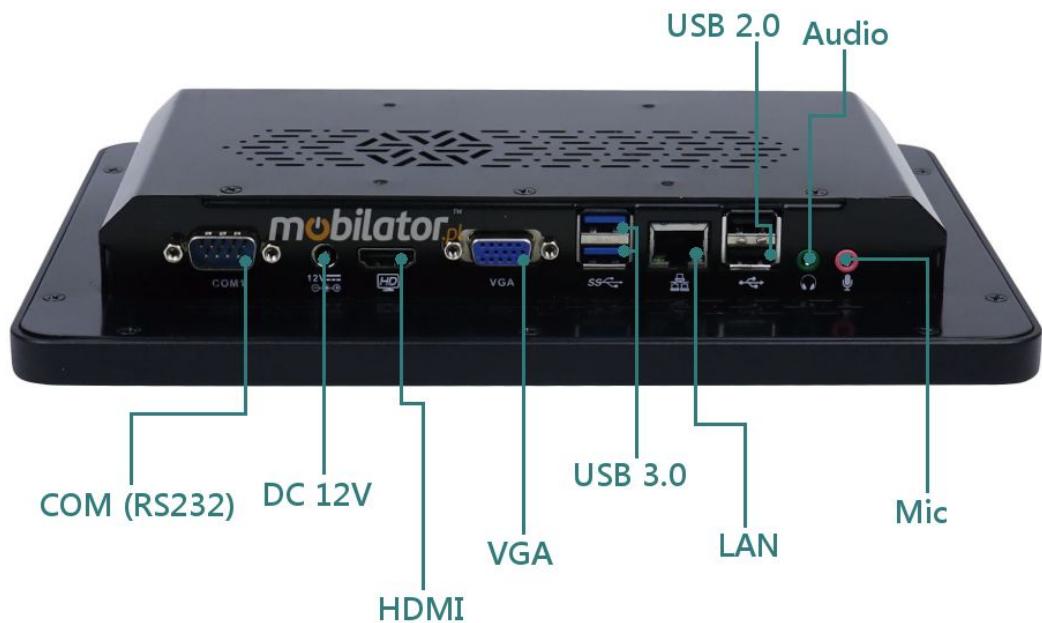

DIMENSIONS



Application



TRADE AND SERVICES

PC Panel is widely used primarily in the commercial industry, for example for controlling the sales system, displaying product information on monitors or advertising on large screens. With the VESA holder in the housing there are many possibilities for its assembly, eg in stores (at the cash register) in factory halls, in a car delivering products, etc. It will certainly be used in all types of retail chains.

WAREHOUSE AND MANAGEMENT

The industrial panel computer thanks to the RS232 interface can be used to connect many devices in the warehouse and facilitate their control. And its rugged housing is ideally suited to the harsh conditions prevailing in such

rooms. No dust or dirt will prevent him from working, he will work without complaints even in a large dusty and dirty environment.

TRANSPORT AND MOTORIZATION

Panel computers can be used in transport by adapting it to work on 12V power supply. Then Panel PC can be used in passenger cars, buses, trams, taxis, trains and even in airplanes. Thanks to the integrated monitor, these panels perform very well in vehicles where mobility and the small size of the device are important.

Available versions and accessories

Industrial industrial computer ITPC A101 is offered in several versions adapted to different needs. By clicking on the number of the hardware configuration you will be redirected to the product with the parameters given in the table below. In addition, it is possible to create a configuration that is currently unavailable on the customer's request.

| | v.0 | v.1 | v.2 | v.3 | v.4 |
|-----------|-----|-----|-----|-----|-----|
| 4GB RAM | — | | | — | — |
| 8GB RAM | — | — | — | | |
| 32GB SSD | — | | — | — | — |
| 64GB SSD | — | — | | | — |
| 128GB SSD | — | — | — | — | |
| WiFi | — | — | | | |