

MTouch



Operator Panel Industrial MobiBOX
Fanless IP65 J1900 800x600 12 v.1



800 x 600

Category:	Industrial Panel PC Computers
Manufacturer:	Mobikator
Supported OS:	Microsoft Windows: 7/8.1/10; Linux
Installed OS:	-----
Screen size:	12.1"
Resolution:	800 x 600
Aspect ratio:	4:3
Brightness:	350 cd/m2
Touchscreen:	Resistive Type 5-Wire Capacitive (option)
CPU Support:	Intel® Celeron™ J1900 (4 x 2.0 GHz)
Installed CPU:	Intel® Celeron™ J1900 (4 x 2.0 GHz)
Graphic Card:	Intel HD Graphics
Storage (HDD) Support:	32 - 512 GB SSD / 320 - 1TB HDD
Installed Storage (HDD):	32 GB SSD
Memory Support:	up to 8GB (max);
Installed Memory:	2 GB
IP Norm:	-----
IP Level (front panel):	IP65

IP Level (back panel):	-----
Temp:	-10°C ~ 60°C
Storage Temp:	-30°C ~ 60°C
Humidity:	10%~ 80%
Anti-shock:	-----
Anti-vibration:	-----
Barcode reader:	-----
RFID scanner (reader):	-----
Others:	Housing color: Black / Silver
LAN:	1 x RTL811E gigabit network card
Wireless LAN card:	Yes
3G:	-----
Bluetooth:	-----
GPS:	-----
Ports - rear panel:	1x COM(RS-232)4x USB 2.01x HDMI1x VGA1xLAN1x Audio1x MIC1x DC-in
Ports - front panel:	-----
Ports - left panel:	-----
Ports - right panel:	-----
Expansion:	-----
Power:	12V DC-in
Power Consumption:	40 W
Watch Dog Timer:	-----
Mounting VESA:	Yes
Folding Bracket (for office type working):	-----
Chipset:	Intel NM10
CD/DVD Drive:	-----
Audio:	Realtek ALG662
TV Tuner:	-----

Backlight MTBF:	LED
Contrast Ratio:	800:1
Dual display:	Yes
Viewing Angle:	70°-85°
Touch Life(contacts):	more than 35 000 000 times
Surface hardness (display):	-----
Color Resolution:	16.7 M
Response time touch-panel (ms):	5
Housing material:	Aluminum Alloy+High Strength Cold Rolled Steel
Dimensions:	319 x 257 x 48 mm
Fanless:	Yes
Weight:	3.51 kg

Product from the Archive - production finished

Operator Panel Industrial
MobiBOX IP65 1037U 12.1

MTouch

IP65
INGRESS PROTECTION

- 12" 12.1 inch**
- Screen Ratio 4:3**
- Resolution: 800x600**
- Combine Multi Ports**
- LED backlight**
- 5 wire resistive**

intel
Celeron
inside

Industrial Panel PC

Industrial Panel PC are excelent in environments dominated by dust, dirt and moisture. They are ideal for applications that require quiet operation.

[go top...](#)



mobikator.pl

MTouch

**Operator Panel Industrial MobiBOX Fanless IP65 J1900 800x600
12 v.1**

MTouch



Panel PC



CPU: Intel® Celeron™ Processor J1900 (2M Cache, 4 x 2.00 GHz)



Memory: 2GB RAM



Disk: 32GB SSD



System: Windows 10 / Windows 8.1 / Windows 7 / Linux



Screen: 12.1" / 800x600 / 4:3 / 5 - Wire Resistive



Expansion cards: none

[go top...](#)

Communication:

Operator Panel Industrial MobiBOX Fanless IP65 J1900 12.1 standard has a system of wireless Wi-Fi communication. Optionally in other models are available also modules such as 3G.



mobikator.pl

Connector:

Integrated **Intel RTL811E Gigabit LAN 1xRJ-45**, **WIFI** module allows you to connect the device to the network. The computer is equipped with: one **LAN** connector, one **COM ports (RS232)**, one **VGA**, one **HDMI** output, four **USB 2.0** ports, one **audio** out, one **microphone** input, and a power **DC-in**.




1. Antena WI-FI
2. DC-IN
3. VGA
4. HDMI

5. 4 x USB 2.0
6. RJ-45
7. Audio
8. Mic

9. COM (RS-232)

Dual Display

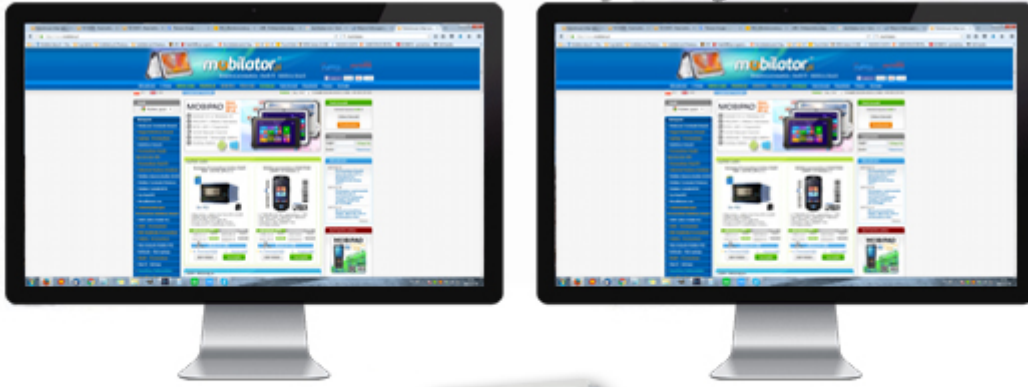

HDMI™
HIGH DEFINITION MULTIMEDIA INTERFACE



VGA

Operator Panel Industrial MobiBOX Fanless IP65 J1900 12.1 has a water-resistant front panel and scratch resistant LED screen. With resolution and high brightness of 350 cd/m2, screen of "5 wire resistive" type with high sensitivity to touch, offers the user a clear ease of use.

MTouch



5-vire resistive



Resistive screen

A resistive touchscreen comprises of several layers, out of which the flexible plastic and glass layers are two important electrical layers. The front surface of resistive touchscreen panel is a scratch-resistant plastic with coating of a conductive material (mostly Indium Oxide, ITO), printed underside. The second important layer is either made of glass or hard plastic and is also coated with ITO. Both layers face each other and are separated with a thin gap in between. An electrical resistance is created between both the layers in such a way that a charge runs from top to bottom in one layer and side-to-side in another. When a finger or stylus tip presses down on the outer surface, the ITO films meet. It is the measure of the resistance of both the layers at point of contact, which leads to get an accurate measure of touch position. The accuracy also relies on the evenness of the coating of ITO on both the layers.



Resistive touchscreen



New Portable Devices | NIP: 872-120-56-82 | Mobile.: +48 508 235 505 | e-mail: sklep@mobilator.pl

Account number: ALIOR BANK SA 68 2490 0005 0000 4500 2328 8078

Resistive screen ensures good visibility, which falls quite firmly in the sun. This type of screen as opposed to a capacitive screen, a

